

3M™ LifeASSURE™ BBA Series Filter Cartridges

Provides reliable microorganism control in food and beverage applications. Designed for durable and long-lasting performance in a variety of food and beverage applications.

Food & beverage applications

- Beer
- Wine
- Bottled Water
- Soft Drinks
- Hard Seltzer (Alcoholic)



Food Contact Compliant



Technical product benefits

- The LifeASSURE BBA filter cartridge is manufactured under an ISO 9001: 2015 certified quality management system.
- LifeASSURE BBA 0.45 µm and 0.65 µm rated filter cartridges provide excellent retention of common spoilage microorganisms.
- LifeASSURE BBA filter cartridges deliver reliable spoilage microorganism retention for: *Lactobacillus Brevis* (0.45 µm) and *Saccharomyces cerevisiae* (0.65 µm).
- The LifeASSURE BBA Filter cartridge design combines asymmetric PES membrane and meltblown polypropylene microfiber media.
- Product complies with applicable US FDA 21-CFR food and beverage contact regulations.
- LifeASSURE BBA filter cartridges are stable with most cleaning and sanitization regimes.
- The LifeASSURE BBA 0.45 µm and 0.65 µm filter cartridges are tested in accordance to NSF Standard 401 for microplastics reduction (≥ 85% efficiency for particles ≥ 0.5µm).

Materials of construction


Component	Materials
Membrane	Polyethersulfone
Support layers	Polypropylene
Inner core, outer cage, end caps	Polypropylene
End cap adaptors	Polypropylene with or without embedded stainless steel reinforcing ring
O-Rings	Silicone or EPR



3M™ LifeASSURE™ BBA Filter Cartridges	Microorganisms	Typical log reduction value (LRV)
BBA 0.45 µm	<i>Lactobacillus Brevis</i>	7
BBA 0.65 µm	<i>Saccharomyces cerevisiae</i>	7

Log Reduction Values are calculated using the following formula:

$$LRV = \log \left(\frac{\text{total number or organisms entering the filter cartridge}}{\text{total number or organisms exiting the filter cartridge}} \right)$$

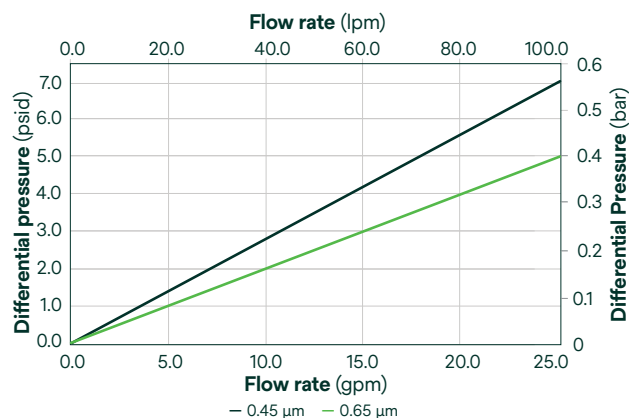

Ordering guide

3M™ LifeASSURE™ Series Filter Cartridges	Ratings (µm)	Cartridge configuration	Length (inches)	End modification	O-ring/ gasket material	Adapter insert
BBA	045 – 0.45 065 – 0.65	A	01 – 10 02 – 20 03 – 30 04 – 40	B – 226 O-Rings & Spear C – 222 O-Rings & Spear	A – Silicone C – EPR	0 = No Insert 2 = SS Insert

BBA045A01BA0 - LifeASSURE BBA, 10in, 0.45µm, 226 with spear endcap and silicone o-ring.

Technical data and operating parameters

Nominal filter cartridge dimensions	
Effective filtration area (10" element)	6.1 ft. ² (0.56 m ²)
Filter cartridge diameter	2.72" (69 mm)
Filter cartridge lengths	10" (254 mm), 20" (508 mm), 30" (762 mm), 40" (1016 mm)
Operating parameters	
Recommended flow rate (10" element)	Beer: 1-2 gpm (3.8-7.6 Lpm) Wine: 2-3 gpm (7.6-11.4 Lpm)
Maximum forward differential pressure	80 psid @ 77°F (5.5 bar @ 25°C) 35 psid @ 194°F (2.4 bar @ 90°C)
Maximum hot water sanitising temperature	Hot water: 194°F (90°C) – 75 hrs. 1 gpm (3.8 LPM), 10 psi (0.69 bar)
Steam sanitising temperature	266°F (130°C) – 150, 30-minute cycles
NaOH cleaning duration	1M Conc. @ 149°F (65°C) - 100 hrs.
Paracetic acid sanitising (27% hydrogen peroxide, 5.0% peracetic acid)	1% Conc. @ 77°F (25°C) - 100 hrs.
Potassium metabisulfite	2oz/gal @ 77°F (25°C) - 100 hrs.
Ethyl alcohol, v/v (ethanol)	70% Conc. @ 77°F (25°C) - 100 hrs.

	BBA045 (0.45 µm)	BBA065 (0.65 µm)
Forward flow test pressure	16 psi (1.1 bar)	4.5 psi (0.2 bar)
Maximum diffusion (10" element)	≤ 24 sccm	≤ 7 sccm
Minimum bubble point	≥ 1.4 bar (20.3 psi)	≥ 0.4 bar (5.8 psi)
Pressure hold test	Consult Purification and Filtration representative	Consult Purification and Filtration representative

Intended Use and Product Selection: LifeASSURE BBA series filter products are intended for use in food and beverage filtration of aqueous fluids in accordance with the applicable product instructions and specifications. LifeASSURE BBA series filter products are also intended for use with non-aqueous fluids where materials of construction are compatible. Since there are many factors that can affect a product's use, the customer and user remain responsible for determining whether the Solventum product is suitable and appropriate for the user's specification, including user conducting an appropriate risk assessment and evaluating the Solventum product in user's application.

Restrictions on Use: Solventum advises against the use of these Solventum products in any application other than the stated intended use(s) since other applications have not been evaluated by Solventum and may result in an unsafe and unintended condition. Do not use in any manner whereby the Solventum product, or any extractable or leachable from the Solventum product, may become part of or remains in a medical device, drug, cosmetic, supplement, infant formula; or in applications involving life-sustaining medical applications or prolonged contact with internal bodily fluids or tissues.

Technical Information: The technical information, guidance, and other statements containing in this document or otherwise provided by Solventum are based upon records by Solventum are based upon records, tests, or experience that Solventum believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgement to the information. No license under any Solventum or third-party intellectual property rights is granted or implied with this information.

Product Selection and Use: Many factors beyond Solventum's control and uniquely within user's knowledge and control can affect the use and performance of a Solventum product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a Solventum product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is expressly identified on the applicable Solventum product literature or packaging (in which case such express warranty governs), Solventum warrants that each Solventum product meets the applicable Solventum product specification at the time Solventum ships the product. SOLVENTUM MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a Solventum product does not conform to this warranty, then the sole and exclusive remedy is, at Solventum's option, replacement of the Solventum product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, Solventum will not be liable for any loss or damage arising from or related to the Solventum product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability

Compliance

Standard
ISO 9001: 2015 Certified Quality Management System
100% diffusion flow tested prior to shipment
Materials of construction comply with USA FDA 21 CFR.*
Tested in accordance to NSF Standard 401 for microplastics reduction (≥ 85% efficiency for particles ≥ 0.5µm)

*The wetted component materials, when used in accordance with Solventum product intended uses and instructions, have been evaluated and found to comply to USA FDA 21 CFR sections 170-186 for food contact applications. For details related to specific use conditions or limitations for food contact applications please contact your Solventum representative for more information.



Solventum Purification & Filtration

Australia
Level 3, Building A, 1 Rivett Road,
North Ryde, NSW 2113
Customer Service: 1300 367 362

New Zealand
Suite 1701, Level 17, PwC Tower,
15 Customs Street West, Auckland 1010
Customer Service: 800 808 182

3M Purification is now Solventum

© Solventum 2024. Solventum, the S logo are trademarks of Solventum or its affiliates. 3M, and the 3M logo are trademarks of 3M. Other trademarks are the property of their respective owners.

070-2016-0419-9 REV 624hb