

Exceptional Brightness



Breathable



Water Repellant

somerton® acrylic

IRISUN SHADE FABRICS

100% solution dyed outdoor acrylic.

somerton[®] acrylic

IRISUN SHADE FABRICS


Somerton[®] Acrylic Irisun Shade Fabrics offers a solution dyed acrylic that assures a high resistance of colour to UV. With exceptional brightness this water repellent fabric is suitable for exterior awnings, outdoor furniture and sunblinds.


PROPERTIES

-  50+ UV Resistant
-  Stain Resistant
-  Abrasion Resistant
-  Mould and Algae Resistant
-  Domestic Energy Saving
-  Solution Dyed
-  Easy to Maintain

SPECIFICATIONS

Roll Weight (Nominal)	21kg
Construction	100% acrylic
Tensile Strength (Weft)	900N
Tear Resistance (Weft)	25N

 10-Year Guarantee

 Width available (cm)

Local sales **1300 785 322**



Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





Colorbond-inspired colours



Built for Local Conditions



Abrasion Resistant

somerton® canvas

Canvas for traditional sun-blind and awning installations.

Extremely durable, classic and contemporary total block-out external sun protection fabric, with long-lasting colour vibrancy.








somerton[®] canvas

When nothing but total sunblock will do, somerton[®] canvas offers an Australian-made range of awning fabrics for traditional exterior sun-blinds, canopy or fixed frame applications that provides the perfect defence against the harsh elements of our sunburnt country. somerton[®] canvas is an ideal and practical choice as a passive energy saving device.

In addition to offering high-level protection against UV, light and water degradation, abrasion, mould and mildew, somerton[®] canvas fabrics surpass Building Council of Australia standards for early fire hazards. The somerton[®] canvas range is backed with with a 5-year guarantee.


Extremely durable, classic and contemporary total blackout external sun protection fabrics with long-lasting colour vibrancy. This is the essence of somerton[®] canvas fabrics by Defab[®].

PROPERTIES

-  Easy to Maintain
-  Chalking Resistant
-  Tear Resistant
-  Fade Resistant
-  Mould and Algae Resistant
-  Salt Water Resistant
-  Colour Matched to Components

SPECIFICATIONS

Roll Weight (Nominal)	32kg
Construction	65/35 poly/cotton
Tensile Strength (Weft)	1300 N/5cm
Tear Resistance (Weft)	40N

 5-Year Guarantee

 Width Available (cm)

Local sales **1300 785 322**



Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au



Window Shading
Association of
Australia



Victorian
Chamber of Commerce
and Industry



Easy to Maintain



Removable Protective Film



Waterproof

somerton® CRISTAL TRIO

A clear PVC with 0% shrinkage and high dimensional stability.





Three layers enable the Cristal Trio to achieve outstanding performance within changing temperatures – both hot and cold.


somerton® CRISTAL TRIO


Somerton® Cristal Trio is a zero-shrinkage multilayer transparent plastic film, with inert middle layer to offer the highest dimensional stability.

Delivered with a protective liner (removable prior to use) is ideal to protect large areas from weather and offers excellent thermal, mechanical and resistance properties.

PROPERTIES

 Transparent
 99% UV Blockout
 UPF 50+
 Made in Europe

 3-Year Guarantee

 Width available (cm)

SPECIFICATIONS

Composition	Transparent and UV stabilised PVC flexible film with removable liner
Weight	620gsm
Thickness	0.5mm
Width	140cm
Length	40m
Stiffness	2S 40± PHR
Breaking Strength (MD)	240 kg/cm ²
Breaking Strength (TD)	220 kg/cm ²
Elongation at Break (MD)	200%
Elongation at Break (TD)	150%
Tear Strength (MD)	60 kg/cm
Tear Strength (TD)	60 kg/cm
Shrinkage (50°C)	0%
Shrinkage (75°C)	0%

Local sales **1300 785 322**

 **defab®**

Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E sales@defab.com.au
defab.com.au





Colorbond Inspired Colours



Built for Local Conditions



Environmentally Friendly

somerton® view

PVC coated woven mesh for external blinds.

somerton[®] view

Somerton View is a woven polyester with high tensile capabilities. This PVC coated mesh is available in 1% and 5% openness which allows for external privacy as well as internal visibility.

10

10-Year Guarantee

270

325

Widths available (cm)

1%

5%

Openness options

PROPERTIES



Mould and Algae Resistant



Fire Retardant



Salt Water Resistant



Easy to Maintain



External Privacy / Internal Visibility



Eco-Friendly Coating



UV Blockout



Lead-Free

FABRIC SPECIFICATIONS

1% OPENNESS

5% OPENNESS

FABRIC SPECIFICATIONS	1% OPENNESS	5% OPENNESS
Composition	36x32	31x31
Weight	660gsm +/- 5%	600gsm +/- 5%
Roll Length	25m	25m
Tensile Strength (Warp / Weft)	2900N / 2400N	2300N / 2200N
Tear Resistance (Warp / Weft)	140N / 120N	116N / 115N
FR Standard	PASS AS1530.2, AS1530.3, NFPA701	

Local sales **1300 785 322**




Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E sales@defab.com.au
defab.com.au



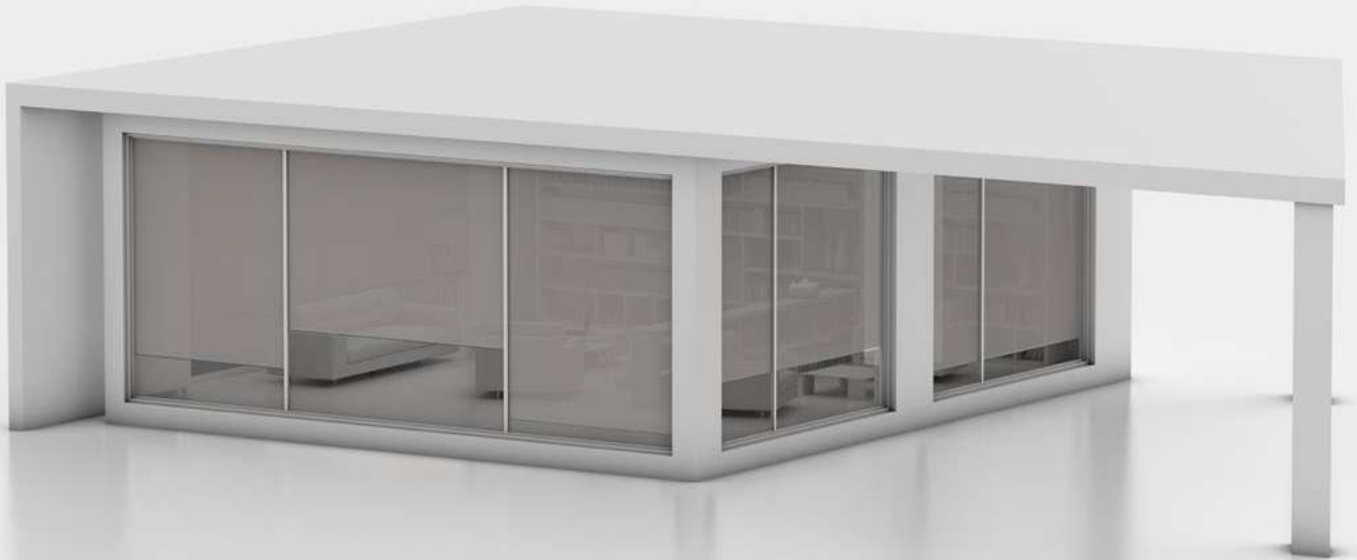

Breathable



High UV Blockout



Fire Retardant

solashadow[®] d-view




PVC coated polyester interior mesh blind fabric.

solashadow[®] d-view

Solashadow D-View is a contemporary and versatile range of internal mesh fabrics suitable for all Roller and Panel Blinds for domestic and commercial applications.


The D-View sunscreen fabric has been developed to provide protection from the harmful effects of the sun whilst giving you the benefit of enjoying the view and privacy – offering you a 5% or 10% openness factor and in 10 designer colours.

PROPERTIES

-  Fade Resistant
-  Easy to Maintain
-  Environmentally Friendly

SPECIFICATIONS

Composition	30% Polyester/70% PVC
Roll Weight (Nominal)	31kg , 37kg
Tensile Strength (Weft)	1500 N/50mm
Tear Resistance (Weft)	1400 N/50mm

 5-Year Guarantee

   Widths available (cm)

  Openness options

Local sales **1300 785 322**

 **defab[®]**
Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E sales@defab.com.au
defab.com.au





Built for Local Conditions



DDP (Defab Duraproofing Process)



Breathable

supaproof[®] 6

**Premium impregnated
proofed canvas.**






A lightweight (6oz base fabric, 8oz finished) premium finely woven 65/35 polyester/cotton specially engineered and impregnated utilising the revolutionary DDP proofing process.


supaproof® 6


Quality and weight balance is guaranteed with supaproof® 6.

supaproof® 6 is tailored for very specific applications namely light-weight tent roofs & walls, awnings, flyovers and camper trailer walls and roofs.

PROPERTIES

-  Shrink Resistant
-  Waterproof
-  UV Resistant
-  Mould and Algae Resistant
-  Environmentally Friendly

 5-Year Guarantee

 Width available (cm)

SPECIFICATIONS

Composition	65% Polyester / 35% Cotton
Weight	295gsm (6oz loomstate, 8oz proofed)
Width	205cm
Roll Length	50m
Roll Weight	30kg
Tensile Strength (Warp)	1700N
Tensile Strength (Weft)	1200N
Tear Resistance (Warp)	65N
Tear Resistance (Weft)	35N
Shrinkage	<2% warp & <1% weft
Water Resistance	33kPa
Cone Leakage	Pass
Rub Fastness	Dry 4-5, Wet 5

Local sales **1300 785 322**

 **defab®**

Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





Built for Local Conditions



DDP (Defab Duraproofing Process)



Breathable

supaproof[®] 8

Premium impregnated proofed canvas.

A light-medium-weight (9oz base fabric, 12oz finished) premium 65/35 polyester/cotton general purpose proofed canvas woven in Australia and impregnated utilising the revolutionary DDP proofing process.


supaproof® 8

supaproof® 8 is highly breathable and is guaranteed to provide superior performance in the most arduous environmental conditions.

The fabric demonstrates no crease whitening in fabrication assisting with end use applications and performance properties. It is ideally suitable for annexe roofs and walls, camper trailer roofs, walls and caravan awnings, retractable covers, bags, satchels and loose covers.

PROPERTIES

-  Shrink Resistant
-  Waterproof
-  UV Resistant
-  Mould and Algae Resistant
-  Tear Resistant
-  Environmentally Friendly

 5-Year Guarantee

  Widths available (cm)

SPECIFICATIONS

Composition	65% Polyester / 35% Cotton	
Weight	420gsm (8oz loomstate, 12oz proofed)	
Width	205cm	245cm
Roll Length	40m	
Roll Weight	34kg	41kg
Tensile Strength (Warp)	2300N	
Tensile Strength (Weft)	1600N	
Tear Resistance (Warp)	50N	
Tear Resistance (Weft)	40N	
Shrinkage	<2% warp & <1% weft	
Water Resistance	30kPa	
Cone Leakage	Pass	
Rub Fastness	Dry 4-5, Wet 5	

Local sales **1300 785 322**

 **defab®**

Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





Built for Local Conditions



DDP (Defab Duraproofing Process)



Fire Retardant

supaproof® 12 fr






Premium impregnated fire retardant proofed canvas.


A medium-weight two-fold warp and weft polyester/cotton waterproof proofed canvas woven in Australia and impregnated with specially formulated flame retardant chemicals utilising the revolutionary DDP proofing process.


supaproof® 12fr

supaproof® 12fr has flame retardant properties which allows it to be utilized in specialised applications and service including elevator protective curtains, welding screens & partitions, commercial transport vehicle seat covers, mining lifting bags, tool rolls, equipment bags, machinery covers and lifting bags.

PROPERTIES

-  Halogen-Free
-  Shrink Resistant
-  Waterproof
-  UV Resistant
-  Mould and Algae Resistant
-  Tear Resistant
-  Environmentally Friendly

 5-Year Guarantee

 205 Width available (cm)

SPECIFICATIONS

Composition	52% Polyester / 48% Cotton
Weight	610gsm (12oz loomstate, 18oz proofed)
Width	205cm
Roll Length	40m
Roll Weight	50kg
Tensile Strength (Warp)	2600N
Tensile Strength (Weft)	2200N
Tear Resistance (Warp)	170N
Tear Resistance (Weft)	93N
Shrinkage	<2% warp & <1% weft
Water Resistance	30kPa
Cone Leakage	<15g
Rub Fastness	Dry 4-5, Wet 4-5
Flammability Test	Pass
Antimicrobial Test	99.90%

Local sales **1300 785 322**

 **defab®**

Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





Built for Local Conditions



DDP (Defab Duraproofing Process)



Breathable

supaproof[®]12




**Premium impregnated
proofed canvas.**


A medium-weight (12oz base fabric, 17oz finished) two-fold warp and weft polyester/cotton waterproof general purpose proofed canvas woven in Australia and impregnated utilising the revolutionary DDP proofing process.

supaproof® 12

supaproof® 12 is ideally suitable for general applications including supported covers, awnings, annexe roofing and walls, trailer covers, campervan roofs and walls, stall covers, swags, hats, bags and tent walls and roofs, agriculture covers and ground sheets.

PROPERTIES

-  Shrink Resistant
-  Waterproof
-  UV Resistant
-  Mould and Algae Resistant
-  Tear Resistant
-  Environmentally Friendly

 5-Year Guarantee

 Width available (cm)

SPECIFICATIONS

Composition	52% Polyester / 48% Cotton
Weight	560gsm (12oz loomstate, 16oz proofed)
Width	205cm
Roll Length	40m
Roll Weight	46kg
Tensile Strength (Warp)	2800N
Tensile Strength (Weft)	1700N
Tear Resistance (Warp)	80N
Tear Resistance (Weft)	50N
Shrinkage	<2% warp & <1% weft
Water Resistance	160kPa
Cone Leakage	Pass
Rub Fastness	Dry 4-5, Wet 5
Fungal Resistance	100%

Local sales **1300 785 322**

 **defab®**
Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





Fire Retardant



Waterproof



Easy to Maintain

duratuff®
pwfr

Premium, tough and durable coated PVC.

Duratuff is a versatile PVC coated fabric designed to meet the performance of Australian and international standards.

duratuff®pwfr


Duratuff PW FR is a versatile PVC coated fabric designed to meet and exceed the performance specifications of Australian Standards.


Coated PVC with gloss acrylic lacquer developed by Defab specialists using the highest quality resins, UV stabilizers & fire retardant standards.

Available in: Black, Charcoal, Chilli Red, Cream, Emerald Green, Heritage Green, Light Blue, Light Grey, Maroon, Navy, Orange, Pink, Purple, Royal Blue, Tan, White and Yellow.

PROPERTIES

 UV Resistant

 3-Year Warranty

 Width available (cm)

FABRIC SPECIFICATIONS

Construction	1000dtex x 1000dtex
Coating	Spread coated PVC
Coating Adhesion	104N/5cm AS4878.8-2001 (ISO2411)
Finish	Gloss acrylic lacquered both sides
Weight	630 gsm
Width	250cm
Roll Length	30m
Tensile Strength (Warp)	2800N/5cm AS4878.6-2001 (ISO13934-1)
Tensile Strength (Weft)	2500N/5cm AS4878.6-2001 (ISO13934-1)
Tear Resistance (Warp)	300N AS4878.7-2001 (ISO4674.1)
Tear Resistance (Weft)	240N AS4878.7-2001 (ISO4674.1)
Temperature Range	-30°+70°C
UV Resistant	Yes
FR Standard	PASS NFPA 701-2004 FR

Local sales **1300 785 322**


Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E sales@defab.com.au
defab.com.au





Tear Resistant



Fire Retardant



Waterproof

duratuff®
ts fr

Premium quality reinforced PVC fabric.

Duratuff is a versatile PVC coated fabric designed to meet the performance of Australian and international standards.

duratuff®tsfr

A premium 680gsm tear stop designed to meet and exceed the performance specifications of Australian Standards.


Reinforced spread coated PVC with gloss acrylic lacquer developed by Defab specialists using the highest quality resins, UV stabilizers & fire retardant standards.

Available in: Black, Chilli Red, Emerald Green, Green, Grey, Heritage Green, Light Blue, Light Grey, Maroon, Navy, Orange, Pink, Royal Blue, White and Yellow.

PROPERTIES

 UV Resistant

 Easy to Maintain

 3-Year Warranty

 Widths available (cm)

FABRIC SPECIFICATIONS

Construction	1000dtex x 1000dtex Tear Stop – 2x2cm
Base Cloth	Tear stop HT Polyester Scrim
Coating	Spread coated PVC
Coating Adhesion	150N/5cm AS4878.8-2001 (ISO2411)
Finish	Gloss acrylic lacquered both sides
Weight	680 gsm
Width	250cm, 320cm
Roll Length	30m
Tensile Strength (Warp)	3500N/5cm AS4878.6-2001 (ISO13934-1)
Tensile Strength (Weft)	3200N/5cm AS4878.6-2001 (ISO13934-1)
Tear Resistance (Warp)	320N AS4878.7-2001 (ISO4674.1)
Tear Resistance (Weft)	290N AS4878.7-2001 (ISO4674.1)
Temperature Range	-30°+70°C
UV Resistant	Yes
FR Standard	PASS NFPA 701-2004 FR

Local sales **1300 785 322**

 **defab®**

Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E sales@defab.com.au
defab.com.au





Manufacturer Inspired Colours



Water Resistant



Tear Resistant

camperfield®

**Canvas for caravan
annexe walling.**

Strong yet light and supple enough to
fit an array of wet weather scenarios.









camperfield®

When outdoor protection needs to be capable of handling the roughest and toughest a sunburnt country has to offer, camperfield® offers external protection fabrics for caravan annexe walls and fixed awnings that are the strongest, most durable available in the market.

Woven from 100% high strength polyester yarns, woven and finished in Australia for Australian and New Zealand conditions.


Camperfield® is 100% blackout from the sun's harmful UV rays, UV resistant, highly rot, mould, mildew and water resistant, available in either 220cm or 245cm width and available in grey backing.

PROPERTIES

-  100% Blockout
-  95% UV Blockout
-  Fade Resistant
-  Mould and Algae Resistant
-  Shrink Resistant
-  Chalking Resistant
-  Abrasion Resistant
-  25 Colours Available
-  Built for Local Conditions

SPECIFICATIONS

Roll Weight (Nominal)	35-38kg
Construction	100% Polyester
Tensile Strength (Weft)	1700 N/5cm
Tear Resistance (Weft)	60N

 5-Year Guarantee

  Widths available

Local sales **1300 785 322**

 **defab®**

Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





DDP (Defab Duraproofing Process)



Built for Local Conditions



Environmentally Friendly

tearlok®
argyle

Light-weight 65/25 polyester cotton proofed canvas. With square Tearlok® ripstop pattern.

Light-weight fabric with technical weatherproofing and a strong durability rating.

tearlok[®] argyle

Suitable for light-weight applications such as light structures; tent walls and roofs. Commercial satchels and bags, seat covers, livestock covers, livestock rugs and light weight weather protection structures.

PROPERTIES

 Shrink Resistant


 Waterproof

 UV Resistant

 Mould and Algae Resistant

 Breathable

 Tear Resistant

 5-Year Guarantee

  Widths available (cm)

SPECIFICATIONS

Composition	65% Polyester / 35% Cotton
-------------	-------------------------------

Weight	400gsm (9oz loomstate, 12oz proofed)
--------	---

Width	205cm	245cm
-------	-------	-------

Roll Length	40m
-------------	-----

Roll Weight	33kg	39kg
-------------	------	------

Tensile Strength (Warp)	1800N
-------------------------	-------

Tensile Strength (Weft)	1300N
-------------------------	-------

Tear Resistance (Warp)	80N
------------------------	-----

Tear Resistance (Weft)	60N
------------------------	-----

Shrinkage	<2% warp & <1% weft
-----------	---------------------

Water Resistance	109kPa
------------------	--------

Cone Leakage	Pass
--------------	------

Rub Fastness	Dry 4-5, Wet 4-5
--------------	------------------

Local sales **1300 785 322**

 **defab[®]**
Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





DDP (Defab Duraproofing Process)



Two-way Ripstop Construction



Built for Local Conditions

tearlok® bison II








Heavy-weight, industrial strength 100% core spun canvas.


Guaranteed protection from the most arduous weather, road and terrain conditions.


tearlok[®] bison II

Suitable for heavy-weight applications such as heavy duty long haul road transport, fixed frame canopies, car tarps, trailer covers and Ute/4WD canopy covers as well as machinery covers. Tearlok[®] Bison II can also be used for hire/builder tarpaulins, heavy duty seat covers and a great deal of general canvas goods applications.

PROPERTIES

	Shrink Resistant
	Waterproof
	UV Resistant
	Mould and Algae Resistant
	Breathable
	Tear Resistant
	Abrasion Resistant

 5-Year Guarantee

 Width available (cm)

SPECIFICATIONS

Composition	52% Polyester / 48% Cotton
Weight	640gsm (14oz loomstate, 17oz proofed)
Width	205cm
Roll Length	40m
Roll Weight	52kg
Tensile Strength (Warp)	2900N
Tensile Strength (Weft)	2900N
Tear Resistance (Warp)	180N
Tear Resistance (Weft)	130N
Shrinkage	<2% warp & <1% weft
Water Resistance	10kPa
Cone Leakage	Pass
Rub Fastness	Dry 4, Wet 5

Local sales **1300 785 322**

 **defab[®]**

Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





DDP (Defab Duraproofing Process)



Ripstop Construction



Built for Local Conditions

tearlok®
boulder









Mid-weight 52/48 polyester cotton proofed canvas. With core spun yarn ripstop.


Budget-priced but constructed to provide higher than normal tear and tensile strength.


tearlok[®] boulder

Suitable for applications of medium to heavy weight such as fixed frame canopies, car tarps, trailer covers and Ute/4WD canopy covers as well as machinery covers. Tearlok[®] Boulder can also be used for hire/builder tarpaulins, heavy duty seat covers and a great deal of general canvas goods applications.

PROPERTIES

	Shrink Resistant
	Waterproof
	UV Resistant
	Mould and Algae Resistant
	Breathable
	Tear Resistant
	Fire Retardant Available
	Environmentally Friendly

 5-Year Guarantee

 Width available (cm)

SPECIFICATIONS

Composition	52% Polyester / 48% Cotton
Weight	595gsm (12oz loomstate, 17oz proofed)
Width	205cm
Roll Length	40m
Roll Weight	49kg
Tensile Strength (Warp)	2400N
Tensile Strength (Weft)	2100N
Tear Resistance (Warp)	125N
Tear Resistance (Weft)	80N
Shrinkage	<2% warp & <1% weft
Water Resistance	10kPa
Cone Leakage	Pass
Rub Fastness	Dry 4-5, Wet 4

Local sales **1300 785 322**


Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





DDP (Defab Duraproofing Process)



Ripstop Construction



Built for Local Conditions

tearlok®
dale









Mid-weight 52/48 polyester cotton proofed check canvas.


Specifically developed to provide year-round comfort with medium to heavy protection for horses or livestock.


tearlok[®] dale

Suitable for medium to heavy-duty swags, livestock rugs and blankets with the protection and comfort your horse needs. Tearlok[®] Dale guarantees comfort and provides a strong durable, waterproof and breathable cover fabric.

PROPERTIES

	Shrink Resistant
	Waterproof
	UV Resistant
	Mould and Algae Resistant
	Breathable
	Tear Resistant
	Fire Retardant Available
	Environmentally Friendly

 5-Year Guarantee

 Width available (cm)

SPECIFICATIONS

Composition	52% Polyester / 48% Cotton
Weight	595gsm (13oz loomstate, 18oz proofed)
Width*	212cm
Roll Length	40m
Roll Weight	50kg
Tensile Strength (Warp)	2800N
Tensile Strength (Weft)	2100N
Tear Resistance (Warp)	153N
Tear Resistance (Weft)	92N
Shrinkage	<2% warp & <1% weft
Water Resistance	43kPa
Cone Leakage	Pass
Rub Fastness	Dry 4-5, Wet 4-5

*Selvedge Edge

Local sales **1300 785 322**

 **defab[®]**
Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





DDP (Defab Duraproofing Process)



Built for Local Conditions



Environmentally Friendly

tearlok®
eyre







Mid-weight 52/48 polyester cotton proofed canvas.

Durable and budget-oriented treated canvas available in a range of solid colours with versatile application.

tearlok[®] eyre

Suitable for applications of fixed frame canopies, swags, trailer and canopy covers, as well as machinery covers. Tearlok[®] Eyre can also be used for industrial curtains, canvas partitions and a great deal of general canvas goods applications.

PROPERTIES

	Shrink Resistant
	Waterproof
	UV Resistant
	Mould and Algae Resistant
	Breathable
	Tear Resistant



5-Year Guarantee



Width available (cm)

SPECIFICATIONS

Composition	52% Polyester / 48% Cotton
Weight	595gsm (12oz loomstate, 17oz proofed)
Width	205cm
Roll Length	40m
Roll Weight	49kg
Tensile Strength (Warp)	2900N
Tensile Strength (Weft)	2100N
Tear Resistance (Warp)	185N
Tear Resistance (Weft)	143N
Shrinkage	<2% warp & <1% weft
Water Resistance	14kPa
Cone Leakage	Pass
Rub Fastness	Dry 4-5, Wet 4

Local sales **1300 785 322**

 **defab[®]**
Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





DDP (Defab Duraproofing Process)



Ripstop Construction



Built for Local Conditions

tearlok®
glen









Mid-weight 52/48 polyester cotton proofed canvas.


Durable treated canvas in vibrant base colours with a fine black check.

tearlok[®] glen

Suitable for heavy-duty swags, livestock rugs and blankets with the protection and comfort your horse needs. Tearlok[®] Dale guarantees comfort and provides a strong durable, waterproof and breathable cover fabric.

PROPERTIES

	Shrink Resistant
	Waterproof
	UV Resistant
	Mould and Algae Resistant
	Breathable
	Tear Resistant
	Fire Retardant Available
	Environmentally Friendly

 5-Year Guarantee

 Width available (cm)

SPECIFICATIONS

Composition	52% Polyester / 48% Cotton
Weight	685gsm (14oz loomstate, 20oz proofed)
Width*	212cm
Roll Length	40m
Roll Weight	58kg
Tensile Strength (Warp)	2900N
Tensile Strength (Weft)	2700N
Tear Resistance (Warp)	100N
Tear Resistance (Weft)	70N
Shrinkage	<2% warp & <1% weft
Water Resistance	5kPa
Cone Leakage	Pass
Rub Fastness	Dry 4-5, Wet 3-4

*Selvedge Edge

Local sales **1300 785 322**

 **defab[®]**
Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





DDP (Defab Duraproofing Process)



Built for Local Conditions



Environmentally Friendly

tearlok®
hume








Mid-weight 52/48 polyester cotton proofed canvas.


Durable and budget-oriented treated canvas available in a range of solid colours with versatile application.

tearlok[®] hume

Suitable for applications of fixed frame canopies, swags, Trailer and canopy covers, as well as machinery covers. Tearlok[®] Hume can also be used for industrial curtains, canvas partitions and a great deal of general canvas goods applications.

PROPERTIES

-  Shrink Resistant
-  Waterproof
-  UV Resistant
-  Mould and Algae Resistant
-  Breathable
-  Tear Resistant
-  Fire Retardant Available

 5-Year Guarantee

 205 Width available (cm)

SPECIFICATIONS

Composition	52% Polyester / 48% Cotton
Weight	590gsm (12oz loomstate, 18oz proofed)
Width	205cm
Roll Length	40m
Roll Weight	48kg
Tensile Strength (Warp)	2600N
Tensile Strength (Weft)	2200N
Tear Resistance (Warp)	170N
Tear Resistance (Weft)	93N
Shrinkage	<2% warp & <1% weft
Water Resistance	10kPa
Cone Leakage	Pass
Rub Fastness	Dry 4-5, Wet 4

Local sales **1300 785 322**

 **defab[®]**
Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





DDP (Defab Duraproofing Process)



Ripstop Construction



Built for Local Conditions

tearlok®
oxen









Mid-weight 52/48 polyester cotton proofed canvas. With core spun yarn ripstop.


Guaranteed protection from the most arduous weather, road and terrain conditions.


tearlok[®] oxen

Suitable for applications of medium to heavy-weight such as fixed frame canopies car tarps, trailer covers and Ute/4WD canopy covers as well as machinery covers. Tearlok[®] Oxen can also be used for hire/builder tarpaulins, heavy-duty seat covers and a great deal of general canvas goods applications.

PROPERTIES

	Shrink Resistant
	Waterproof
	UV Resistant
	Mould and Algae Resistant
	Breathable
	Tear Resistant
	Fire Retardant Available
	Environmentally Friendly

 5-Year Guarantee

 Width available (cm)

SPECIFICATIONS

Composition	52% Polyester / 48% Cotton
Weight	600gsm (13oz loomstate, 18oz proofed)
Width	205cm
Roll Length	40m
Roll Weight	49kg
Tensile Strength (Warp)	2900N
Tensile Strength (Weft)	2100N
Tear Resistance (Warp)	170N
Tear Resistance (Weft)	131N
Shrinkage	<2% warp & <1% weft
Water Resistance	10kPa
Cone Leakage	Pass
Rub Fastness	Dry 4-5, Wet 4

Local sales **1300 785 322**

 **defab[®]**
Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





Breathable



Ripstop Construction



Tear Resistant

tearlok® summer checks




Light-weight 100% loomstate polyester fabric and light-weight 100% loomstate polycotton fabric.


Specifically developed to provide year-round comfort with light to medium protection for horses or livestock. Thermal properties can be extended with a winter rug.


tearlok[®] summer checks

Suitable for livestock rugs and blankets with the protection and comfort your horse or animal needs through the spring and summer months. You also have the option of a winter rug, insuring extra insulation for those cool or cold nights.

PROPERTIES

-  Shrink Resistant
-  UV Resistant
-  Mould and Algae Resistant
-  Breathable
-  Environmentally Friendly

 5-Year Guarantee

 Width available (cm)

SPECIFICATIONS

	Breeze	Summer Check	Dale Summer	Glen Summer
Composition	65% Polyester 35% Cotton	100% Polyester	52% Polyester 48% Cotton	52% Polyester 48% Cotton
Weight	270gsm	295gsm	430gsm	490gsm
Width*	212cm	212cm	212cm	212cm
Roll Length	50m	50m	50m	50m
Roll Weight	29kg	31kg	46kg	52kg
Tensile Strength (Warp)	1800N	2800N	2100N	3000N
Tensile Strength (Weft)	1300N	1200N	1900N	2500N
Tear Resistance (Warp)	140N	134N	261N	304N
Tear Resistance (Weft)	108N	129N	169N	250N

*Selvedge Edge

Local sales **1300 785 322**



Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





Built for Local Conditions



Ultrasonic Welded Seams



Mould and Algae Resistant

rx12®




General use canvas.

Strength, durability and element protection at an economical price

rx12[®]

When the capacity for strength, durability and waterproofing has to fit a very tight budget and surface texture and appearance are not critical, rx12[®] general purpose 12oz canvas is engineered as a low cost economical solution for a myriad of general applications.

PROPERTIES

-  Waterproof
-  Tear Resistant
-  Environmentally Friendly

SPECIFICATIONS

Roll Weight (Nominal)	40kg
Construction	52/48 poly/cotton
Tensile Strength (Weft)	1870 N/5cm
Tear Resistance (Weft)	98N



Guaranteed to last



Width available

Local sales **1300 785 322**



Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E canvas@defab.com.au
defab.com.au





Exceptional Brightness



Breathable



Water Repellant

admiral®

Superior marine acrylic.

Optimum weather protection
from sunrise to sunset.

admiral®

admiral® 100% solution dyed acrylic has been engineered to withstand the rigors of the most extreme elements of salt, water and damaging rays of the sun. admiral® from defab® is a superior marine acrylic guaranteed to deliver optimum weather protection from sunrise to sunset.

admiral® is the experts fabric of choice as it provides maximum protection from the ever changing natural elements. Ideal for boat covers, bimini tops, marine and sail covers, fly bridge enclosures, cockpit, tonneau, screens, outdoor furniture, cushions and market umbrellas.



10-Year Guarantee



Widths available (cm)

PROPERTIES



50+ UV Resistant



Stain Resistant



Abrasion Resistant



Mould and Algae Resistant



Domestic Energy Saving



Solution Dyed



Easy to Maintain

SPECIFICATIONS

Roll Weight (Nominal) 21 kg

Construction 100% acrylic

Tensile Strength (Weft) ca 90 DaN

Tear Resistance (Weft) 2,5 DaN

Local sales **1300 785 322**



Weaving history since 1976

30 Somerton Park Drive
Campbellfield VIC 3061

T +61 3 9305 3988
F +61 3 9305 1377
E sales@defab.com.au
defab.com.au






PRODUCT SPECIFICATIONS

BILLABONG™

Billabong is the highest quality, light-medium weight, blended polyester/cotton Canvas tent fabric available. Billabong is a very tightly constructed fabric as it is woven from fine yarn counts. Billabong is designed specifically for higher quality family frame tents and campervan roofing and walling.

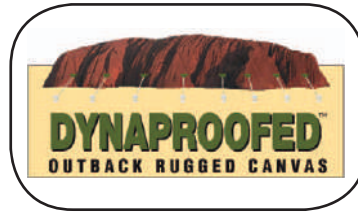


WEIGHT:	Loomstate: 300g/sq.m (8.8oz) +/-30gsm Dynaproofed: 370g/sq.m (10.9oz) +/-30gsm
WIDTH:	Loomstate: 191cm Dynaproofed: 183cm
CONSTRUCTION:	Woven 64/35 Poly/Cotton Plain Weave 29 ends per cm. 17 picks per cm. Yarn Count 2/20 E.C.C. x 2/20 E.C.C.
Maximum Shrinkage:	2% in Warp
Tear Resistance: (AS 2001.2.10)	WARP - 66N WEFT - 42N
Breaking Force (AS 2001.2.3)	WARP - 1800N WEFT - 1300N
Hydrostatic Head: (AS 2001.2.17)	750mm min
Cone Test: (AS 2001.2.18)	Pass
Stock Colours:	Antelope, Beige, Blue, Brunswick Green, Grey, Jade, Khaki, Light Grey, Light Sand, Navy and Olive



PRODUCT SPECIFICATIONS

BULLDUCK .T.T™

Bullduck T.T. has a Tearstop construction with Terylene/Cotton cospun threads woven throughout the fabric. These threads are woven in both the warp and weft directions to reinforce the tear and tensile qualities of this very strong canvas. The fabric is designed specifically for very large semi-trailer truck tarpaulins where extra strength is required.

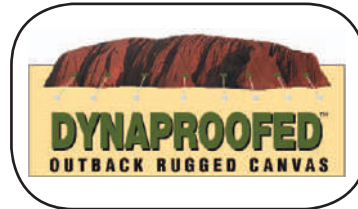

WEIGHT:	Loomstate: 426g/sq.m (12.6 oz) +/- 30gsm Dynaproofed: 535g/sq.m (16 oz) +/- 30gsm
WIDTH:	Loomstate: 214cm Dynaproofed: 200cm
CONSTRUCTION:	Woven 50/50 Poly/Cotton Tearstop Weave 23.6 ends per cm. 15.3 picks per cm. Yarn Count 2/12 ECC x 2/12 ECC (2/10 Cospun tear threads)
Maximum Shrinkage	2% in Warp
Tear Resistance: (AS 2001.2.10)	WARP - 207N WEFT - 125N
Breaking Force (AS 2001.2.3)	WARP - 2589N WEFT - 1644N
Hydrostatic Head: (AS 2001.2.17)	1000mm min
Cone Test: (AS 2001.2.18)	Pass
Stock Colours:	Antelope, Blue, Green, Grey, Olive and Red




PRODUCT SPECIFICATIONS

COOLABAH™

Coolabah is a superfine Poly/Cotton “Japara” quality tenting fabric. It has been especially designed and developed for the continental and family-style frame Tent, for both roofs and walls.

Coolabah is also recommended as a high quality walling for campervans where a large amount of fabric can be folded into a tight compact area.

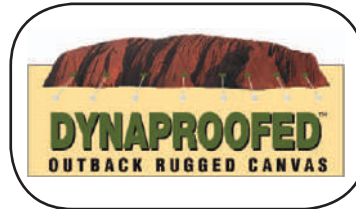


WEIGHT:	Loomstate: 218g/sq.m (6.4 oz) +/- 30gsm Dynaproofed: 275g/sq.m (8 oz) +/- 30gsm
WIDTH:	Loomstate: 191cm Dynaproofed: 183cm
CONSTRUCTION:	Woven 65/35 Poly/Cotton Plain Weave Japara 39.4 ends per cm. 26.8 picks per cm. Yarn Count: 1/20 ECC x 1/20 ECC
Maximum Shrinkage	2% in Warp
Tear Resistance: (AS 2001.2.10)	WARP - 39N WEFT - 28N
Breaking Force (AS 2001.2.3)	WARP - 1221N WEFT - 1087N
Hydrostatic Head: (AS 2001.2.17)	750mm min
Cone Test: (AS 2001.2.18)	Pass
Stock Colours:	Antelope, Beige, Blue, Brunswick Green, Grey, Light Grey, Light Sand, Olive



PRODUCT SPECIFICATIONS

DX12™

DX12 is a medium weight, general-purpose blended poly/cotton canvas which is especially suitable for a wide range of applications. These include: swags, marquee and tepee roofs and walls, temporary shelters, under tarpaulins, box-trailer covers and heavy-duty campervan roofs and walls. DX12 is also perfect for annexe roofs in semi-permanent situations, as well as high quality family marquee roofs and walls.

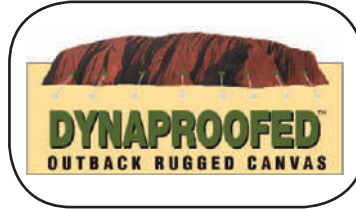

WEIGHT:	Loomstate: 410g/sq.m (12.1 oz) +/- 30gsm Dynaproofed: 505g/sq.m (14.9 oz) +/- 30gsm
WIDTH:	Loomstae: 210cm Dynaproofed: 204cm
CONSTRUCTION:	Woven 52/48 Poly/Cotton Plain Weave 22.8 ends per cm. 15 picks per cm. Yarn Count 2/12 ECC x 2/12 ECC
Maximum Shrinkage	2.5% in Warp
Tear Resistance: (AS 2001.2.10)	WARP - 116N WEFT - 68N
Breaking Force (AS 2001.2.3)	WARP - 2195N WEFT - 1523N
Hydrostatic Head: (AS 2001.2.17)	800mm min
Cone Test: (AS 2001.2.18)	Pass
Stock Colours:	Antelope, Beige, Black, Blue, Green, Brunswick Green, Dark Green, Grey, Khaki, Lt. Grey, Lt. Sand, Maroon, Navy, Olive, Olive F/R and Aus Cam D.P.
Flammability:	Olive F/R tested to AS1530 Part 3 Results available on request