

Residential BESS

-Force L Series



Safety and Reliability

Ensured by own designed and manufactured cell, modules and BMS



Optimal Electricity Cost

Long cycle life and superior performance



Strong Scalability

Maximum capacity of 215.04 kWh with 6 groups in parallel




Flexible Mounting

Plug&Play, no additional wiring connection



Compatibility

Compatible with Top inverter brands

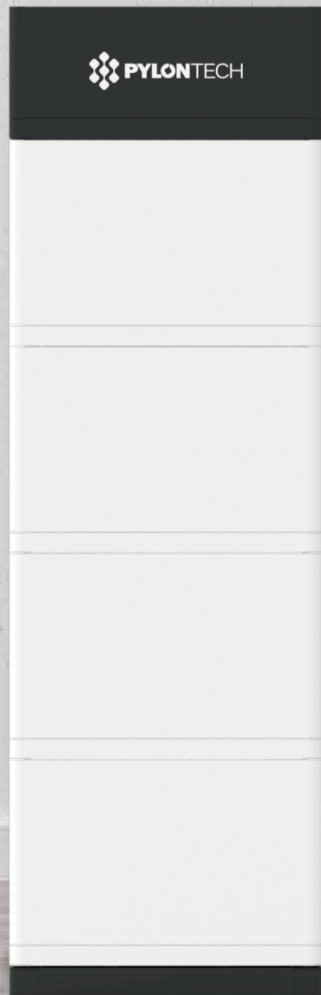



SPECIFICATION (Force-L1/48V)



Basic Parameters						
Battery Module	FL48074					
Battery System Capacity(kWh)	7.1	10.65	14.21	17.76	21.31	24.86
Voltage Range(Vdc)	43.5~54					
Dimension(W*D*H mm)	600*380*530	600*380*700	600*380*870	600*380*1040	600*380*1210	600*380*1380
Weight(kg)	86.5	123	159.5	196	232.5	269
Depth of Discharge	95%					
(Recommend)	30	45	60	75	90	100
Charge/ Discharge Current(A)	75	100	100	100	100	100
(Peak @ 15s)	105	105	105	105	105	105
Multi-group	Max. 6 systems in parrallel					
Communication Port	RS485, CAN					
IP rating	IP55					
Working Temperature/ °C	0~50					
Shelf Temperature/ °C	-20~60					
Humidity	5%~95%(w/o condensing)					
Altitude	< 2000					
Design Life	15+ Years (25 °C / 77°F)					
Cycle Life	> 8,000, 25 °C					
Certification	VDE2510-50/IEC62619/IEC62477/CE/UN38.3					