



BBR Level1 Performances

*Nicolas Clerboux, Almudena Velazquez, Edward Baudrez, Christine Aebi
Royal Meteorological Institute of Belgium (RMIB)*

DISC “BBR” team present at this Workshop



**Almudena Velazquez
Blazquez**

- BM-RAD processor
- BMA-FLX processor (LW part)



Carla Salas Molar

- BMA-FLX processor (SW part)



Edward Baudrez


- BM-RAD and BMA-FLX processors (soft.)
- BBR geolocation



Christine Aebi

- Independent evaluation of the BBR L1 & L2 products (Prodex Cal/Val activity “BRAVO”).

BBR in the Production Model (European part)

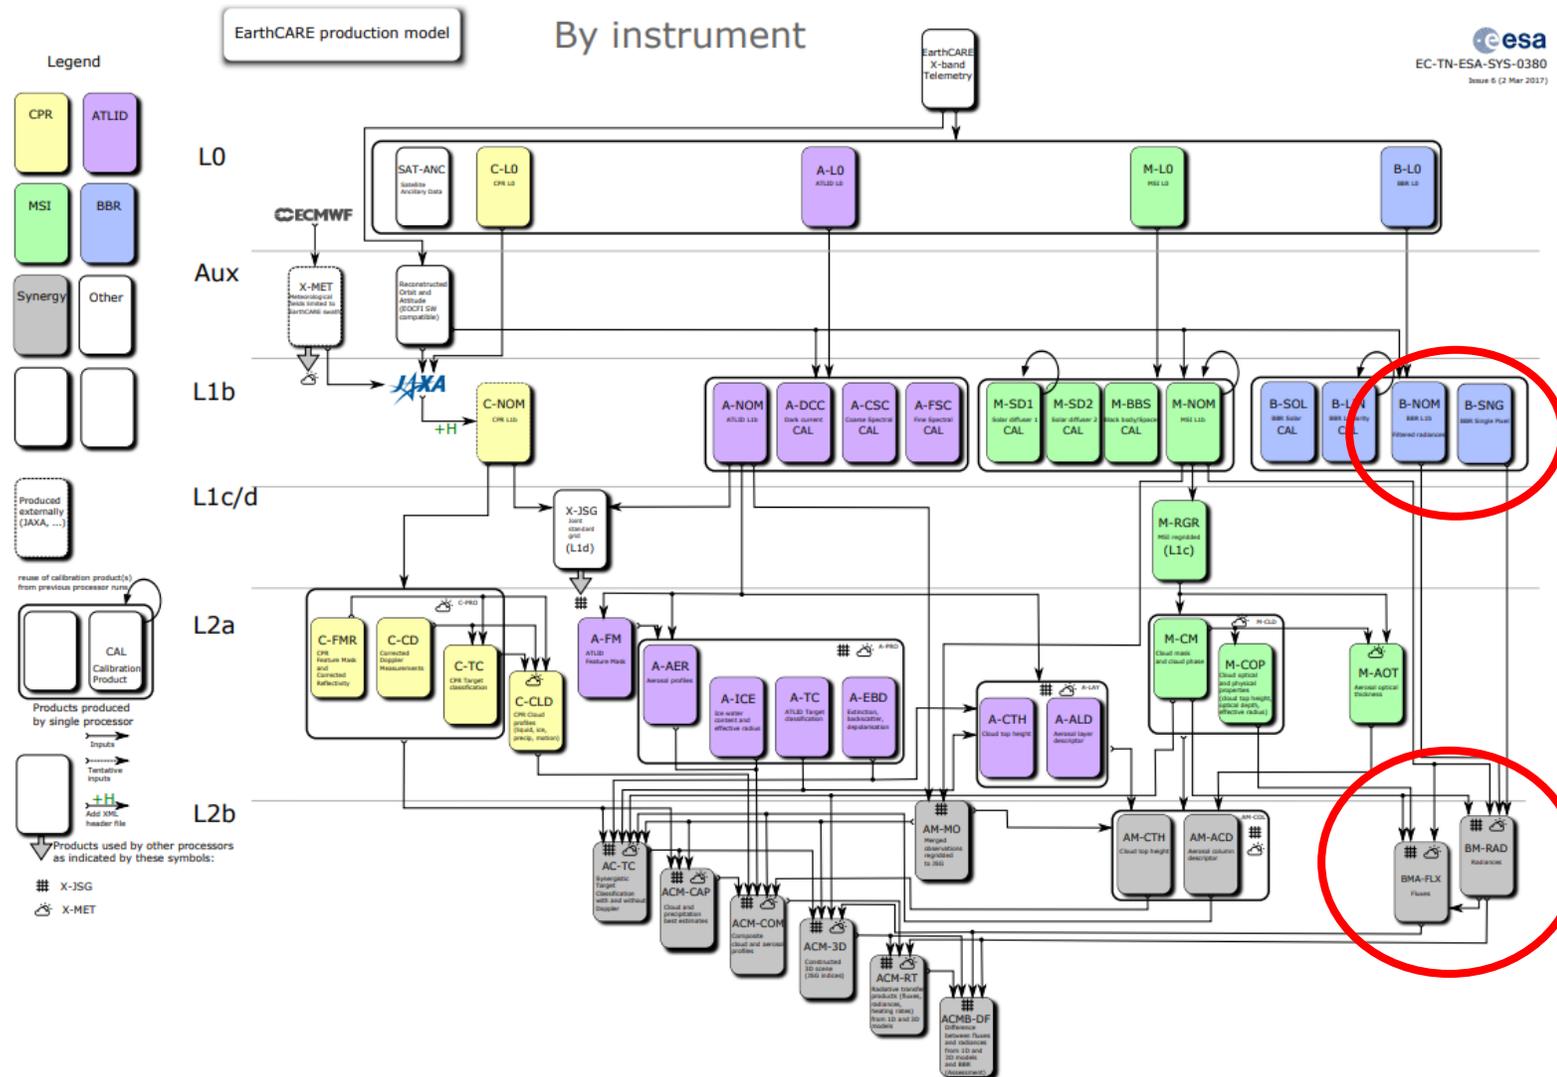

BBR Level 1 :

- B-SNG product : detector's SW and TW radiances
- B-NOM product : SW and LW radiances in integration domains (e.g. 10x10km)

BBR Level 2 :

- BM-RAD : unfiltered SW and LW radiances
- BMA-FLX : TOA SW and LW fluxes + fluxes combining the 3 views

Content : BBR Level 1 Performances

Content:


- Overview B-SNG product
- BBR sampling
- BBR calibration strategy
- B-SNG detector noise analysis
- B-SNG detector radiometric consistency analysis
- Proposed update of 'B' values

Directly a second talk on

- B-SNG comparison with CERES FLASHflux
- BBR level 1 evolution
- Summary


Other BBR contributions during the WS:

- MSI and BBR geolocation and coregistration performance assessment: an update, poster #2, Edward Baudrez.
- EarthCARE BBR Validation Results within the BRAVO project, poster #39, Christine Aebi
- Validation of BBR TOA broadband irradiance by high altitude airborne solar and thermal-infrared radiometer measurements, poster #38, André Ehrlich
- L2 BM-RAD and BMA-FLX products verification, Wed., Almudena Velazquez
- Radiative Closure Verification with EarthCARE BBR Solar and Thermal Fluxes, Wed., Carla Salas

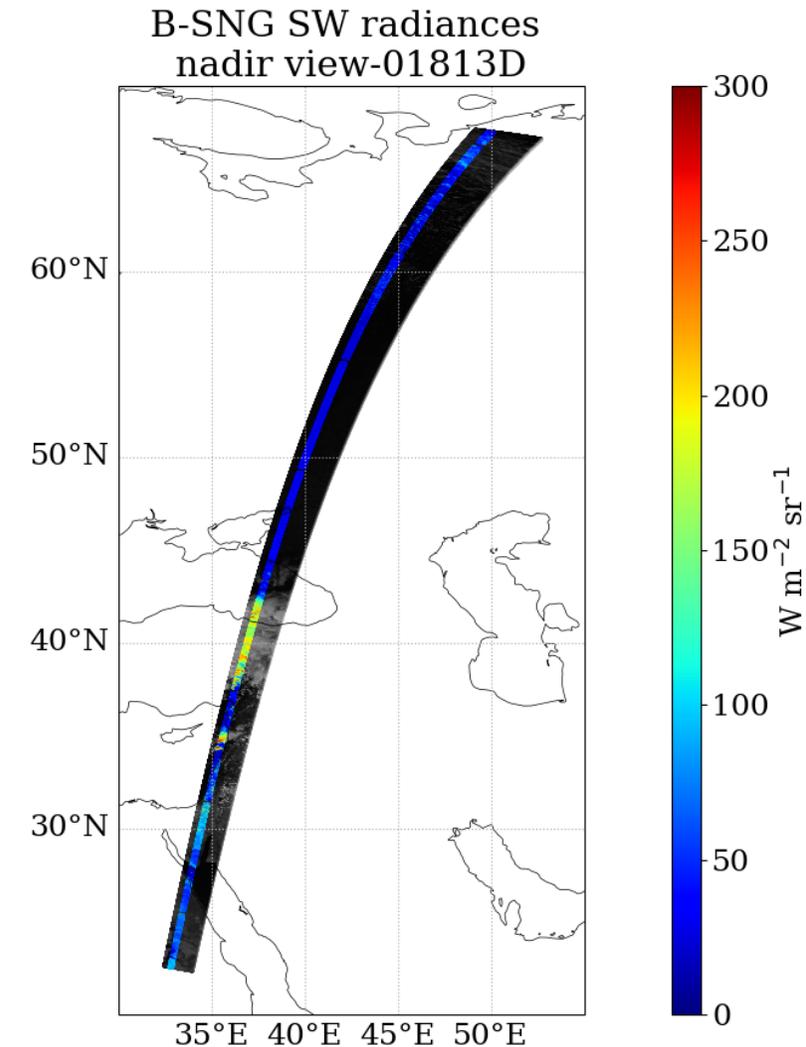


Overview B-SNG Product

- 3 views along-track: aft, nadir, fore
- 30 detectors for each view
- 2 interleaved spectral bands: TW, SW (quartz filter)
- BBR instrument operated mostly at 75% of the CDM speed (configurable). For a same band (TW or SW):
 - $dt = 0.1532$ sec
 - along track sampling ~ 1113 m
- Initially B-SNG was not foreseen to be released as a product (only B-NOM).
- B-SNG interesting for integration over other domains (e.g. the elongated assessment domain)
- B-SNG provides filtered TW and SW radiances

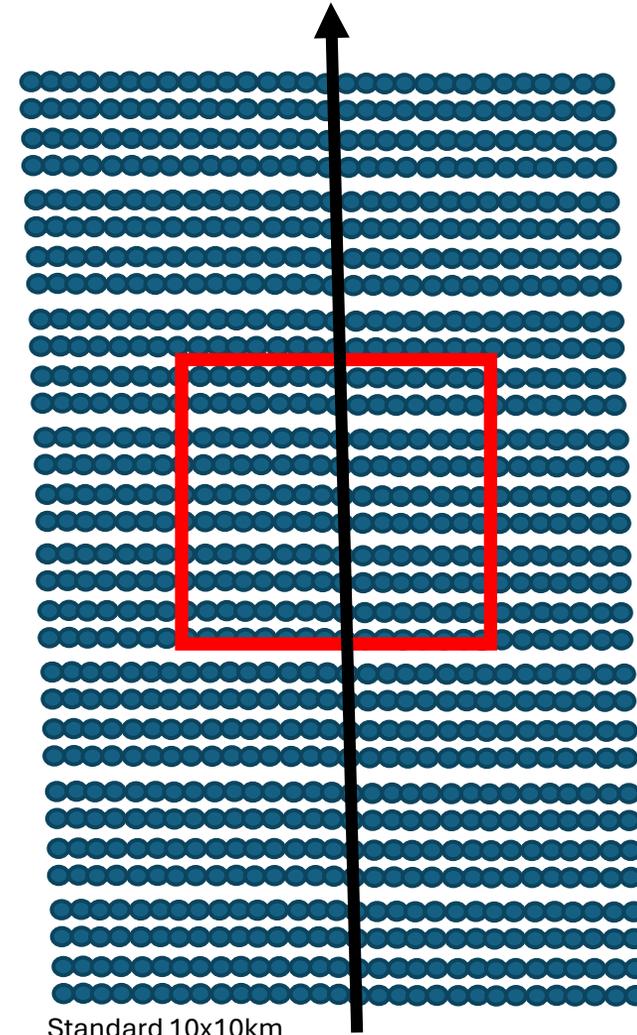


Standard 10x10km
nadir : 16 * 9 pixels
Aft/fore : 10 * 9 pixels


B-SNG sampling (CDM speed 75%)

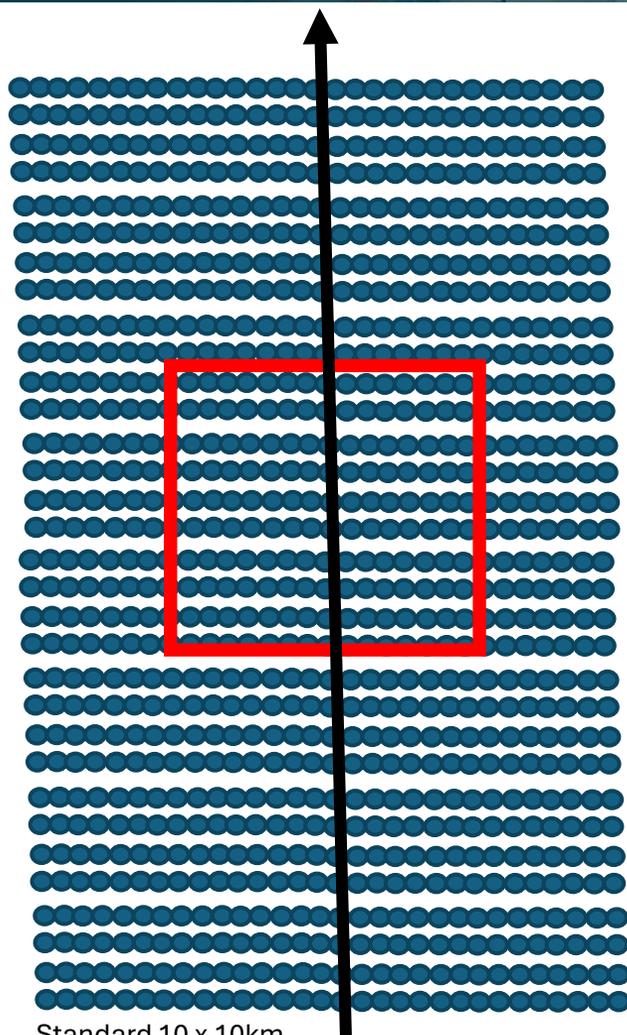

Standard 10 x 10km
nadir : 16 * 9 pixels
Aft/fore : 10 * 9 pixels

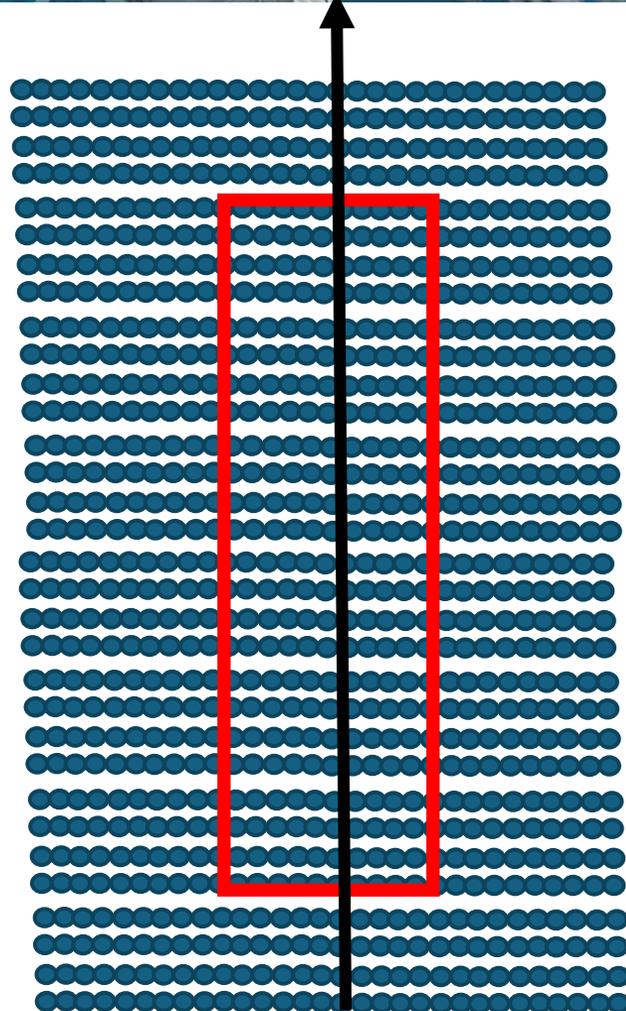

Assessment Domain 5 x 21 JSG pixels (~km)
nadir : 8 * 19 pixels
Aft/fore : 5 * 19 pixels

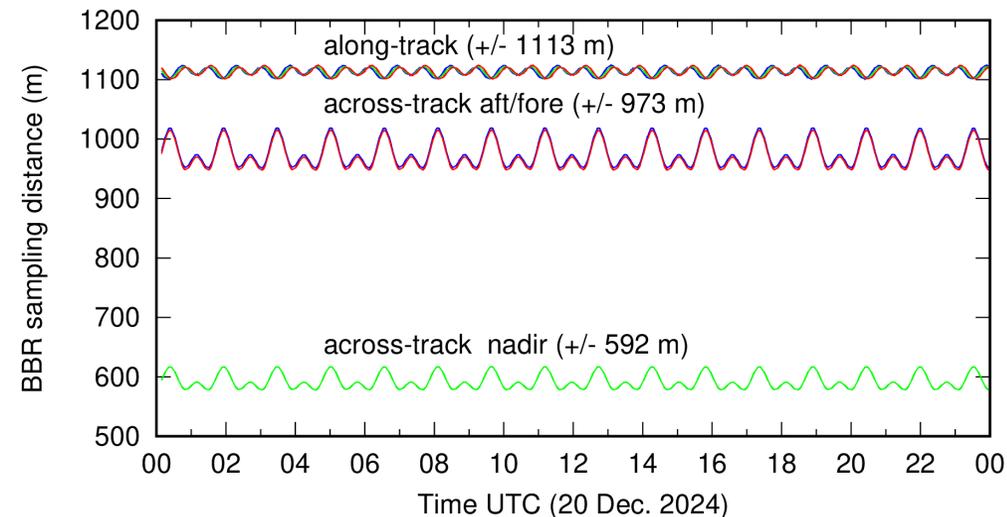

View	Across-track	Along track
Aft	975m ± 21m [950m:1020m]	1113m ± 7m [1101m:1124m]
Nadir	592m ± 12m [577m:618m]	1113m ± 6m [1102:1122m]
Fore	971m ± 21m [946m:1016m]	1113m ± 7m [1101m:1124m]

BBR calibration strategy

Longwave calibration each 88s

- Observation of warm and cold blackbodies:
→ LW gain (G_{LW}) and offset for each of the 3 x 30 detectors


Shortwave calibration, each 88s

- Update the SW gain using 'fixed' B factors:
→ $G_{SW} = B * G_{LW}$
- Offset via observation of the cold blackbody

Solar calibration, every 2 months

- Monitoring using the sun diffuser (NDM)
- Spectral degradation via Monitoring Photo-Diodes (MPDs)
-> *Done, results under analysis by ICMF*


warm
blackbody → ●
@ ~302K

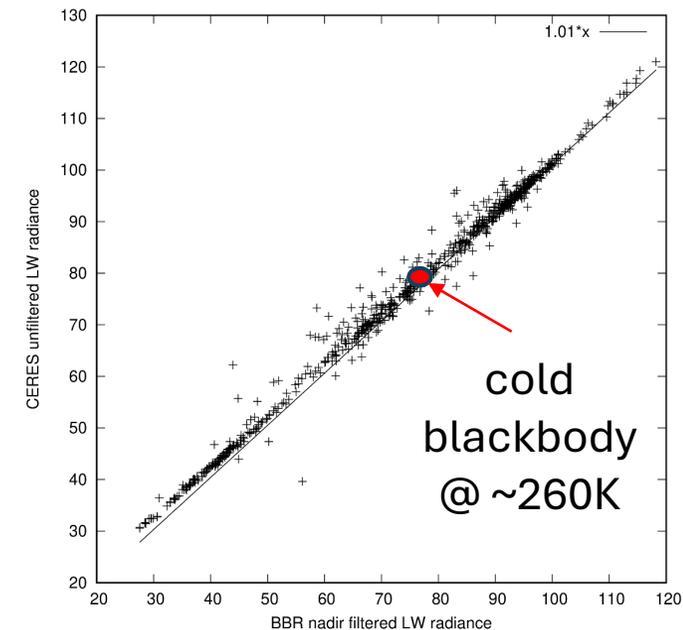

B-SNG detector noise

- Using nighttime SW images (frame 'A')
- Small overall bias due to thermal contamination (~ 0.15 $\text{W}/\text{m}^2/\text{sr}$)
- About $\varepsilon \sim 0.8$ $\text{W}/\text{m}^2/\text{sr}$
 - > $\varepsilon \sim 0.75$ $\text{W}/\text{m}^2/\text{sr}$ det. noise
 - > $\varepsilon \sim 0.30$ $\text{W}/\text{m}^2/\text{sr}$ cal. noise

→ significant detector noise that has also systematic effect via the calibration

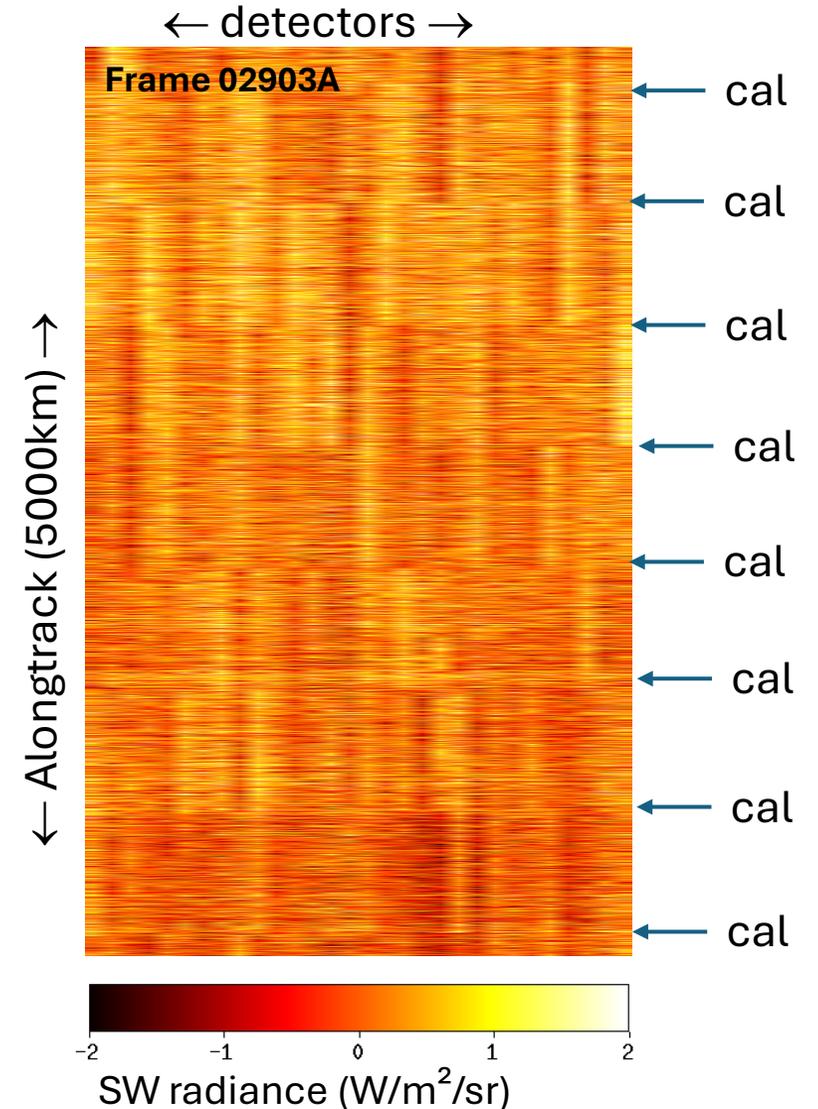

B-SNG detector noise


- Noise level similar between the detector and stable during commissioning, except:
 - Fore det #6 : “broken”
 - Nadir det #20 : bias low.
- Noise reduction in integration domains:
 - Standard domain (10x10km, i.e. 10/16 x 9 pix):

$$\varepsilon = \text{sqrt}\left(\left(\frac{0.75}{\sqrt{90}}\right)^2 + \left(\frac{0.30}{\sqrt{10}}\right)^2\right) = 0.12 \text{ W/m}^2/\text{sr} \text{ (aft/fore)}$$


$$\varepsilon = \text{sqrt}\left(\left(\frac{0.75}{\sqrt{154}}\right)^2 + \left(\frac{0.30}{\sqrt{16}}\right)^2\right) = 0.10 \text{ W/m}^2/\text{sr} \text{ (nadir)}$$
 - Assessment domain (21x5km, i.e. 5/8 x 19 pix)

$$\varepsilon = \text{sqrt}\left(\left(\frac{0.75}{\sqrt{95}}\right)^2 + \left(\frac{0.30}{\sqrt{5}}\right)^2\right) = 0.15 \text{ W/m}^2/\text{sr} \text{ (aft/fore)}$$

$$\varepsilon = \text{sqrt}\left(\left(\frac{0.75}{\sqrt{152}}\right)^2 + \left(\frac{0.30}{\sqrt{8}}\right)^2\right) = 0.12 \text{ W/m}^2/\text{sr} \text{ (nadir)}$$

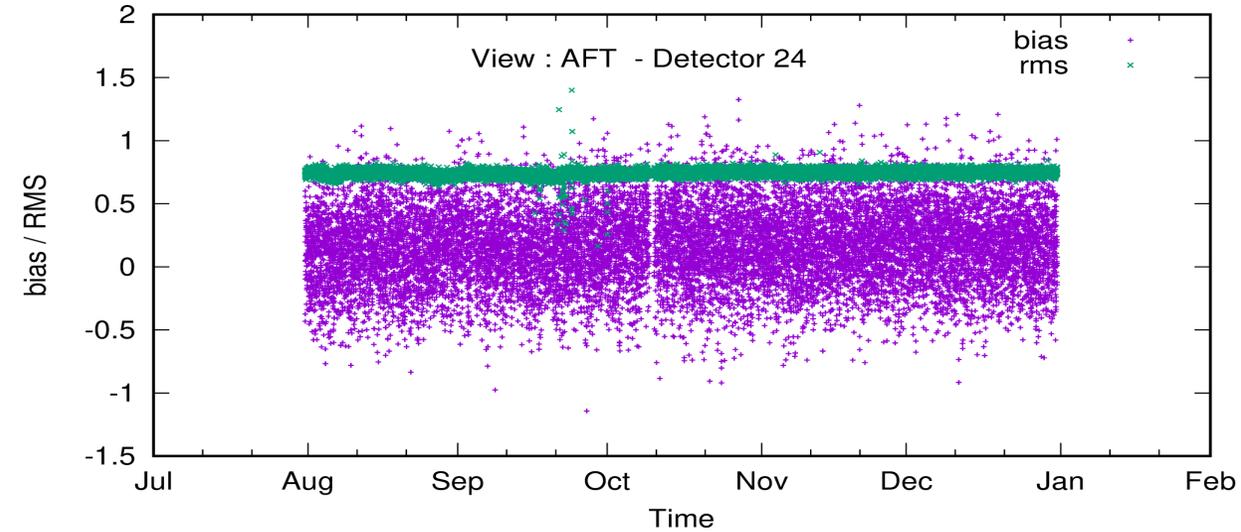

Night time SW radiance analysis (frame A)

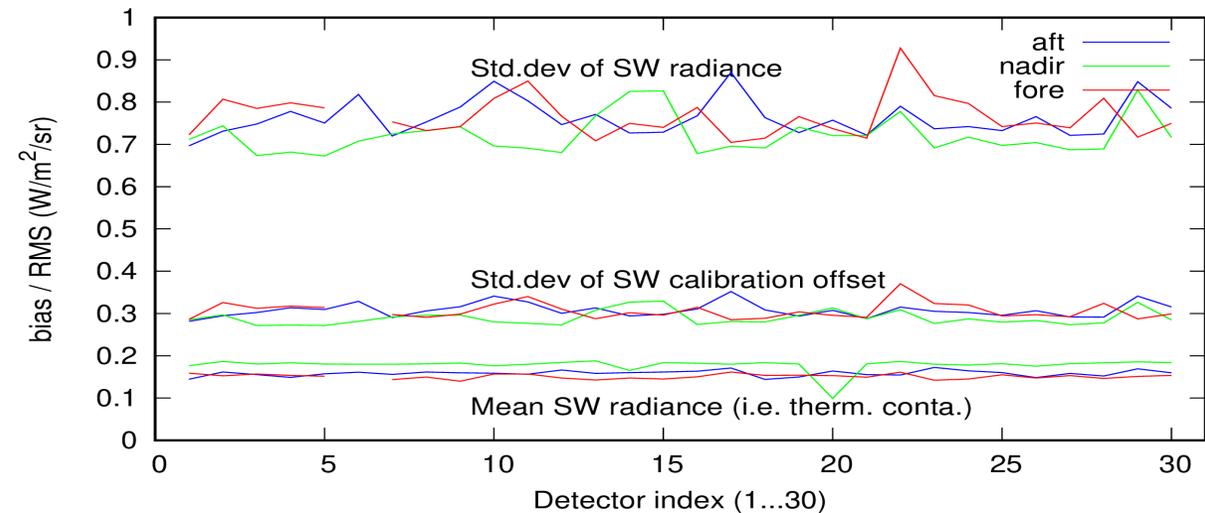

B-SNG detector radiometric consistency

Input : 19953 B-SNG files (26 July 2024 to 5 Jan. 2025)

TW night (LW radiation)

- consistent detector LW calibration
- Consistent fore/aft views

SW day





- Aft/det.8-13 too sensitive to SW
- Det-to-det variability for the nadir view (due to B factors in the CCDB)

TW day (LW+SW)


- Aft det. 8-13 too sensitive to SW
- Nadir variability (to be investigated)

SW night (therm contamination + noise)



- Consistent with expected thermal contamination
- Nadir det #20 to be investigated.

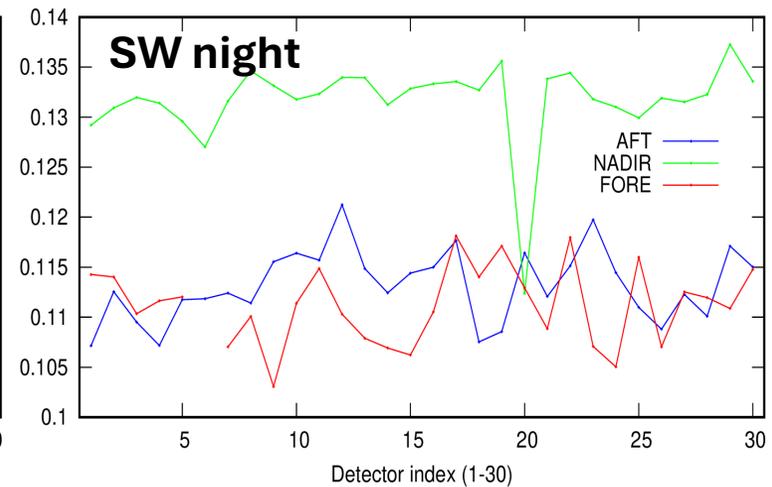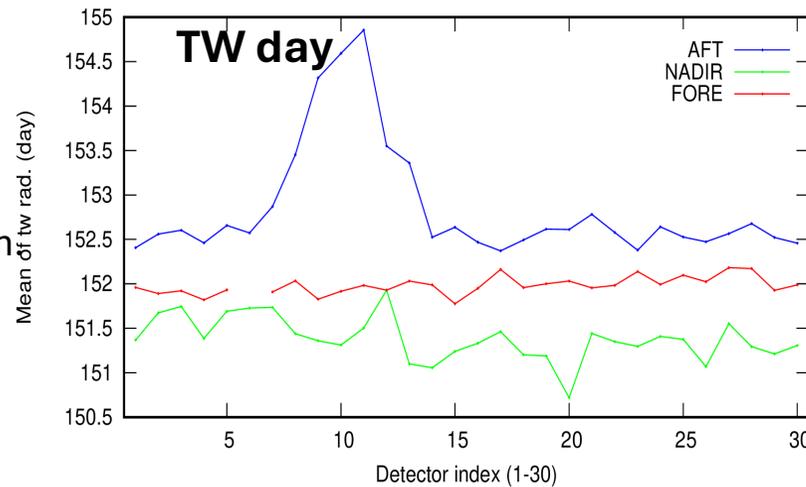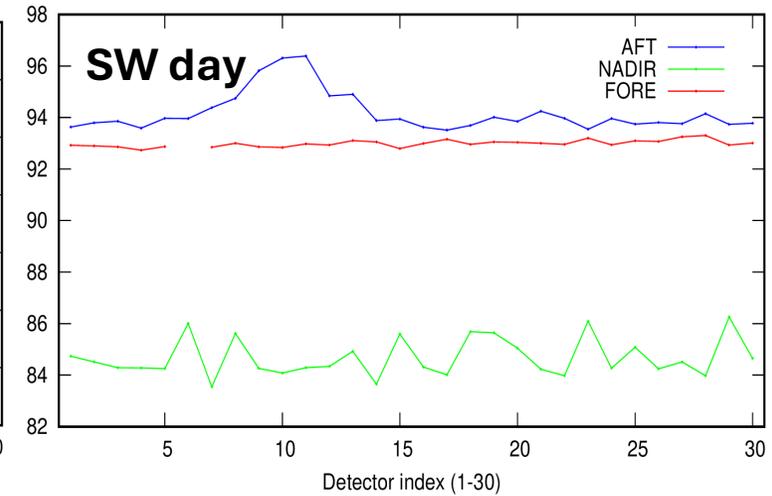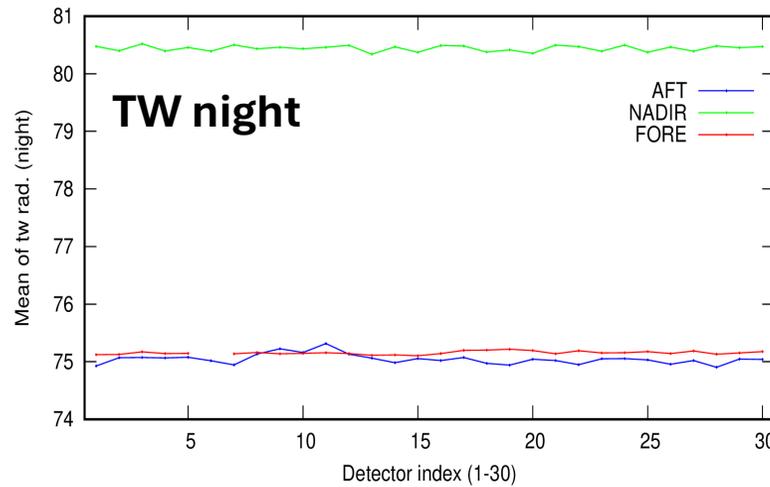



Proposed update of the 'B' factors

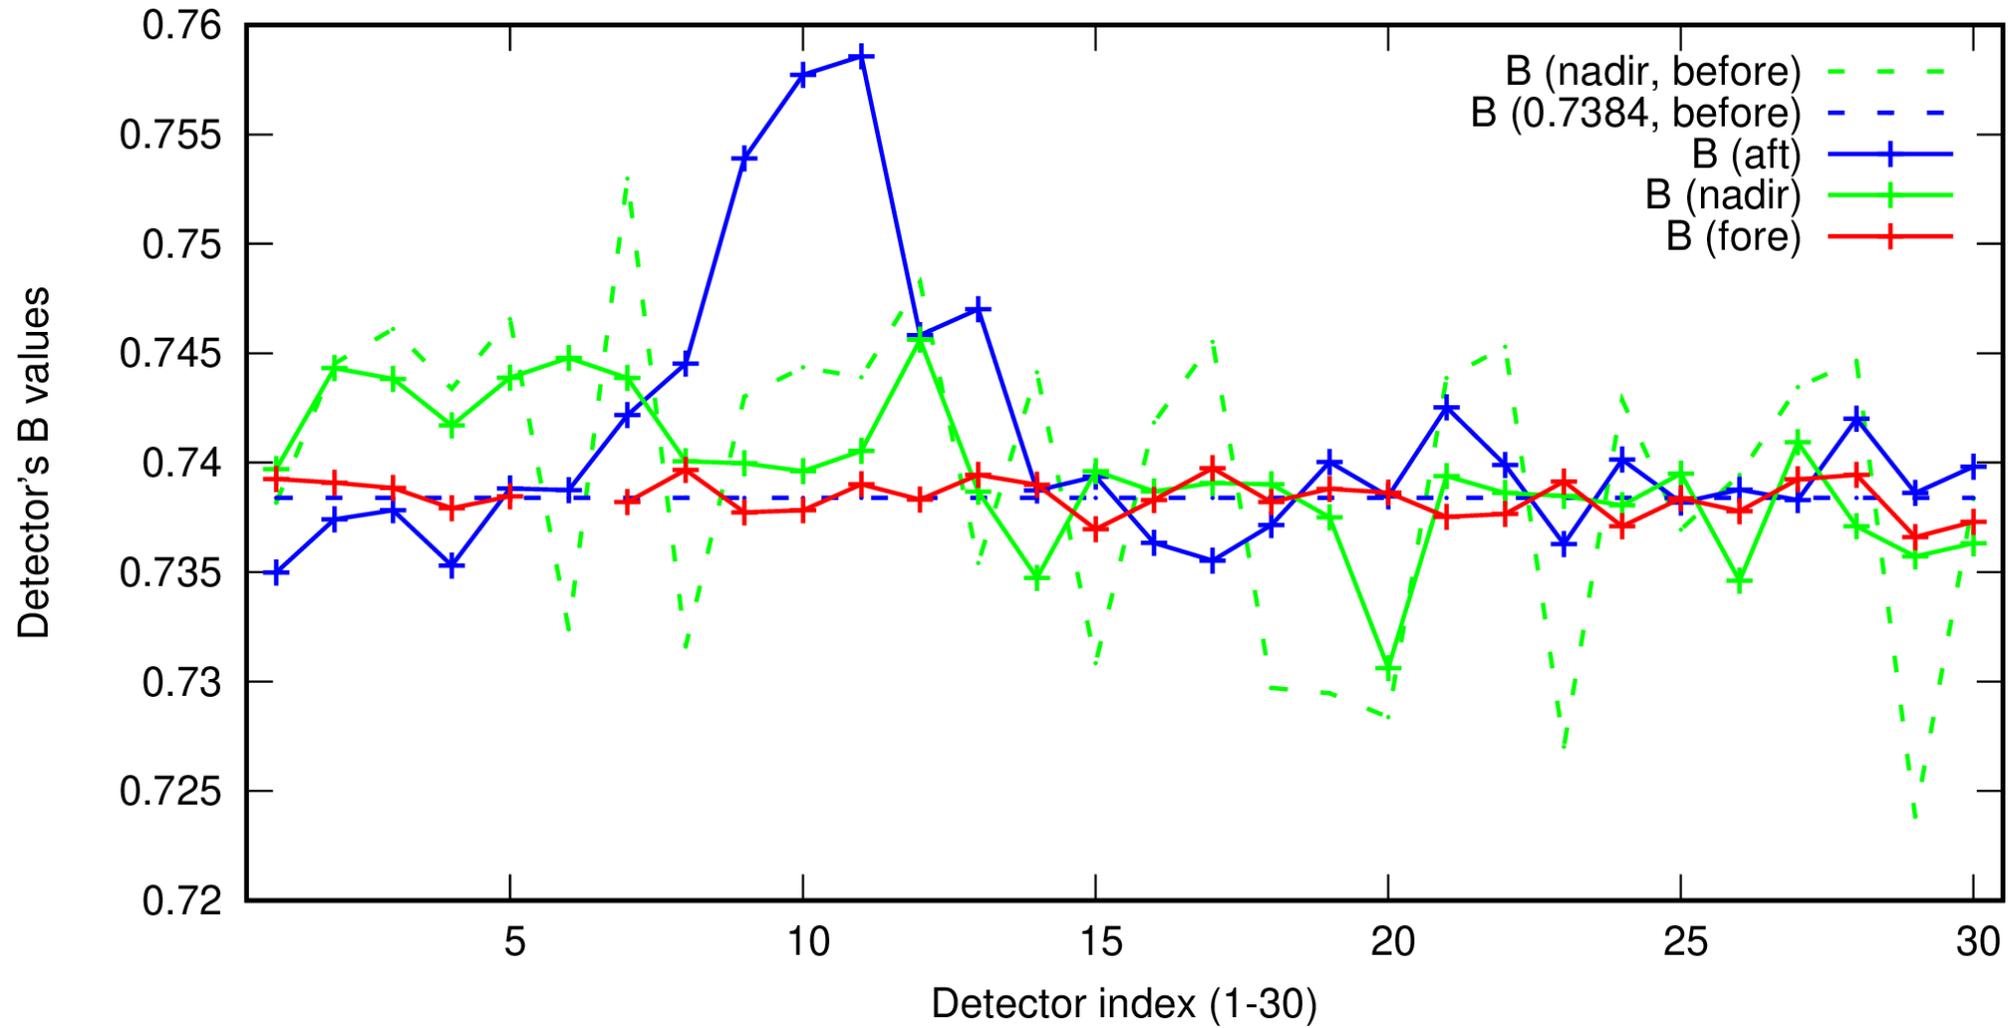



B_SNG detector radiometric consistency : daily analysis - AFT

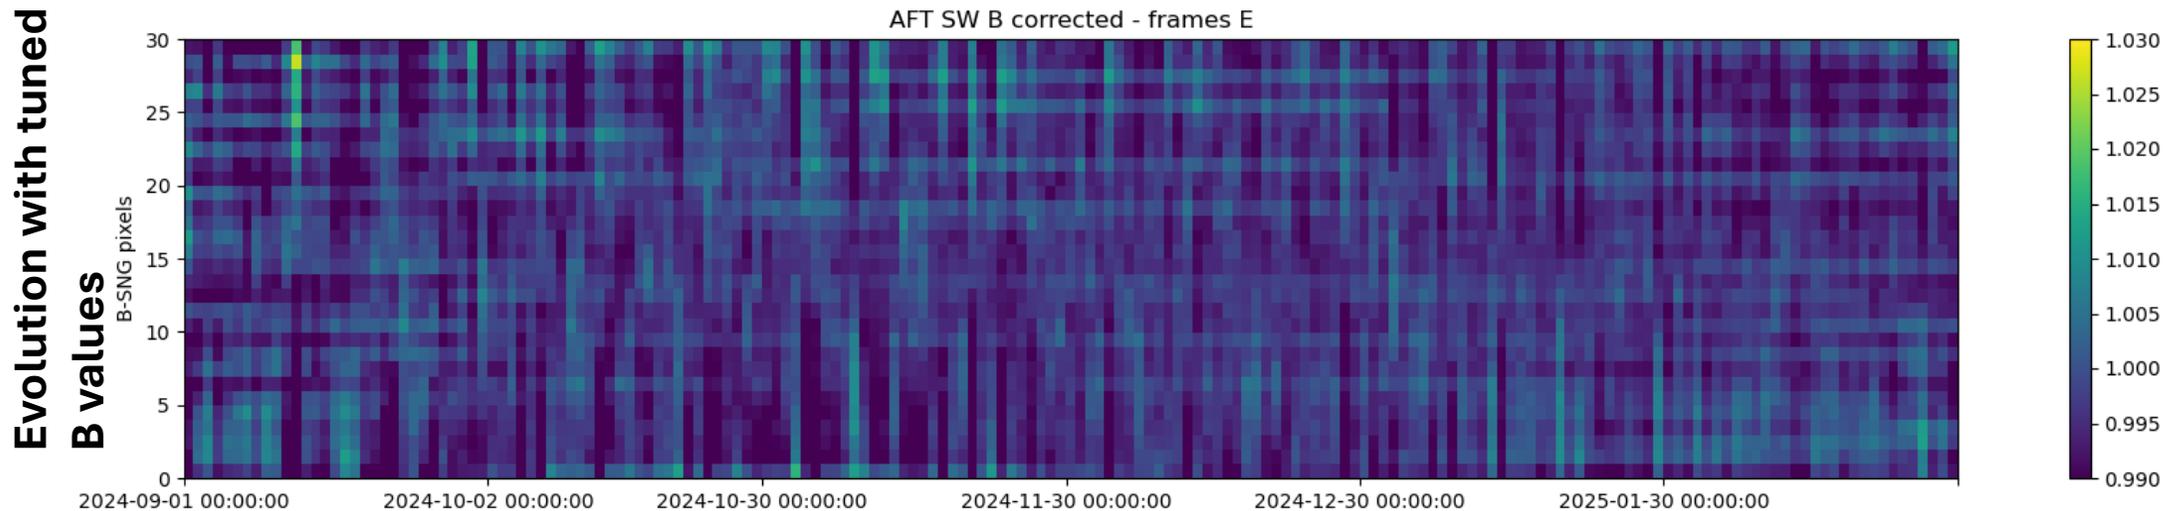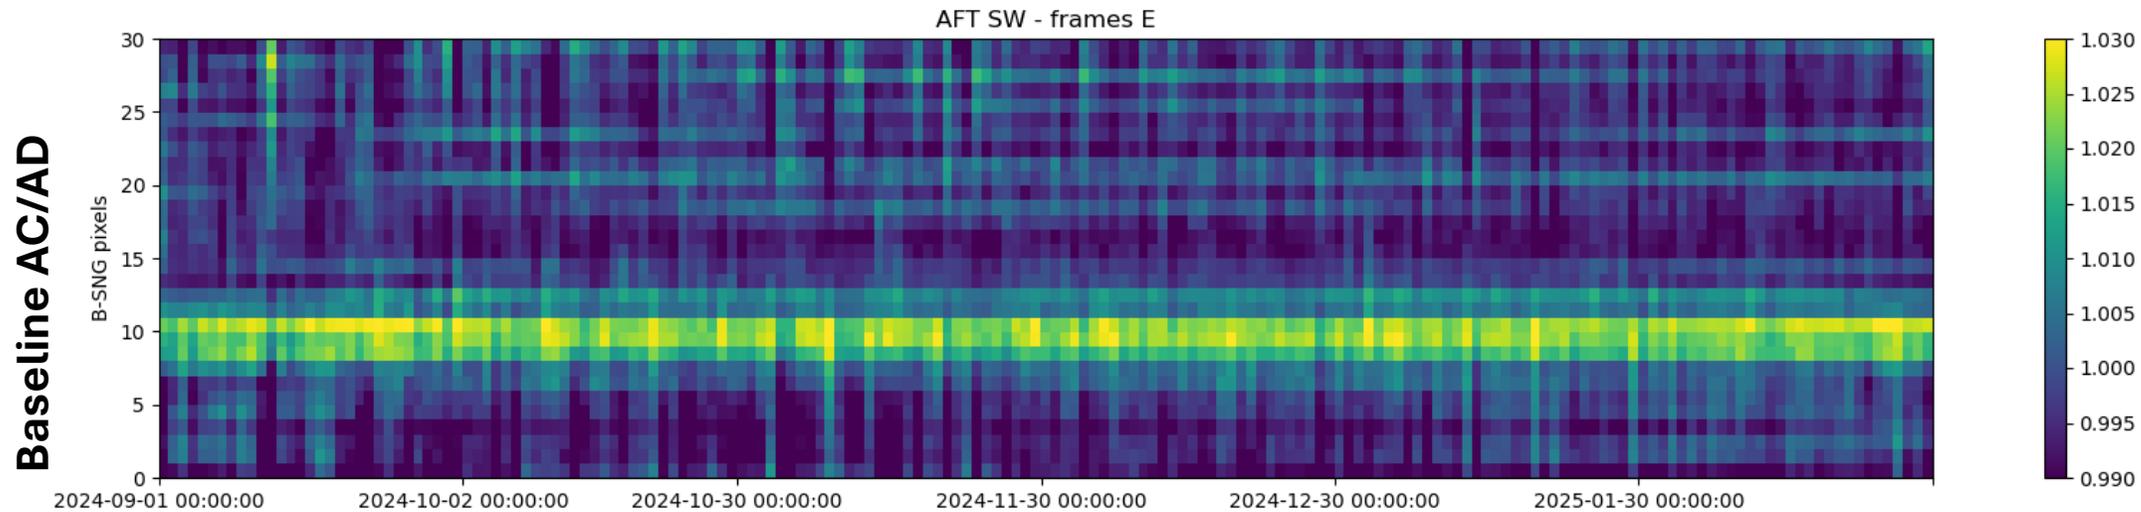

B_SNG detector radiometric consistency : daily analysis - NADIR

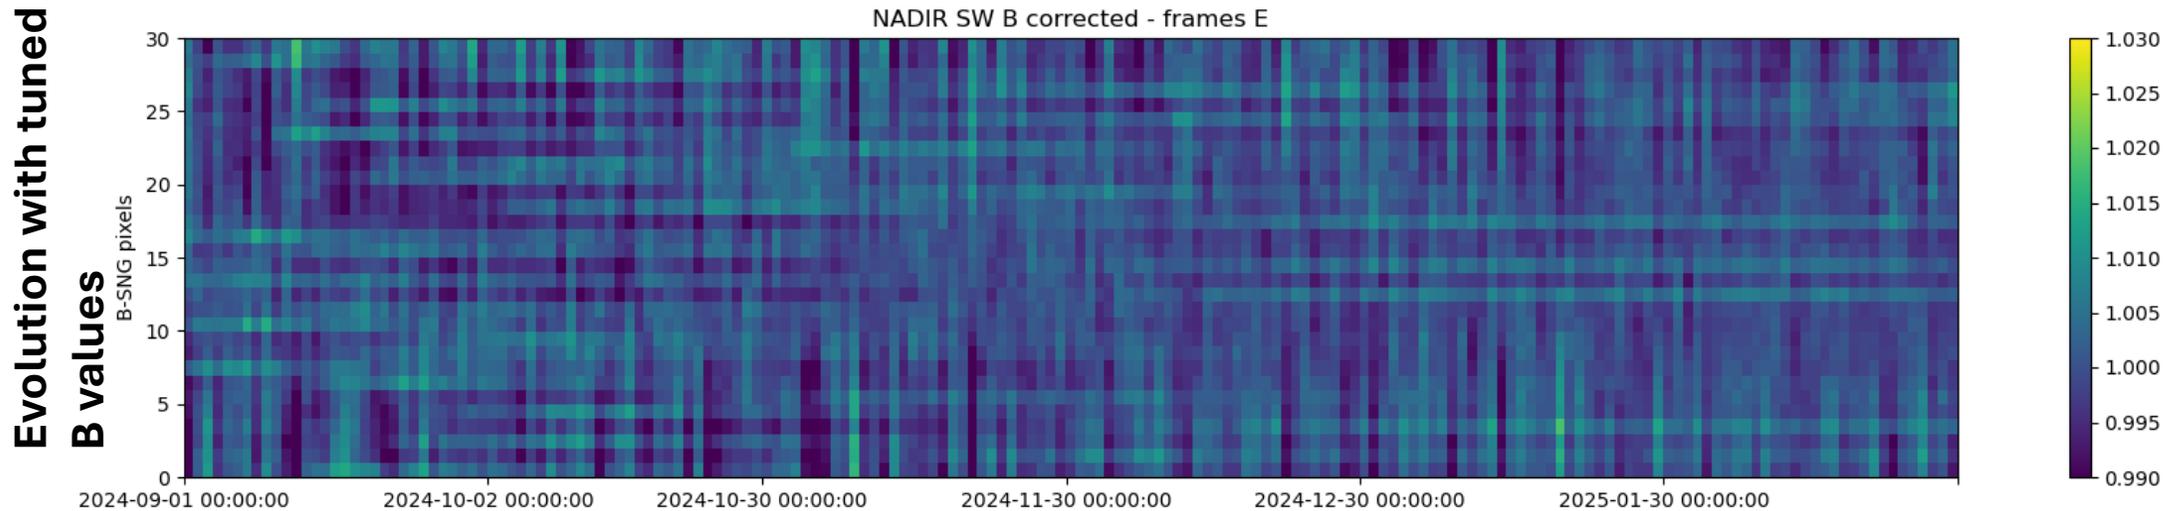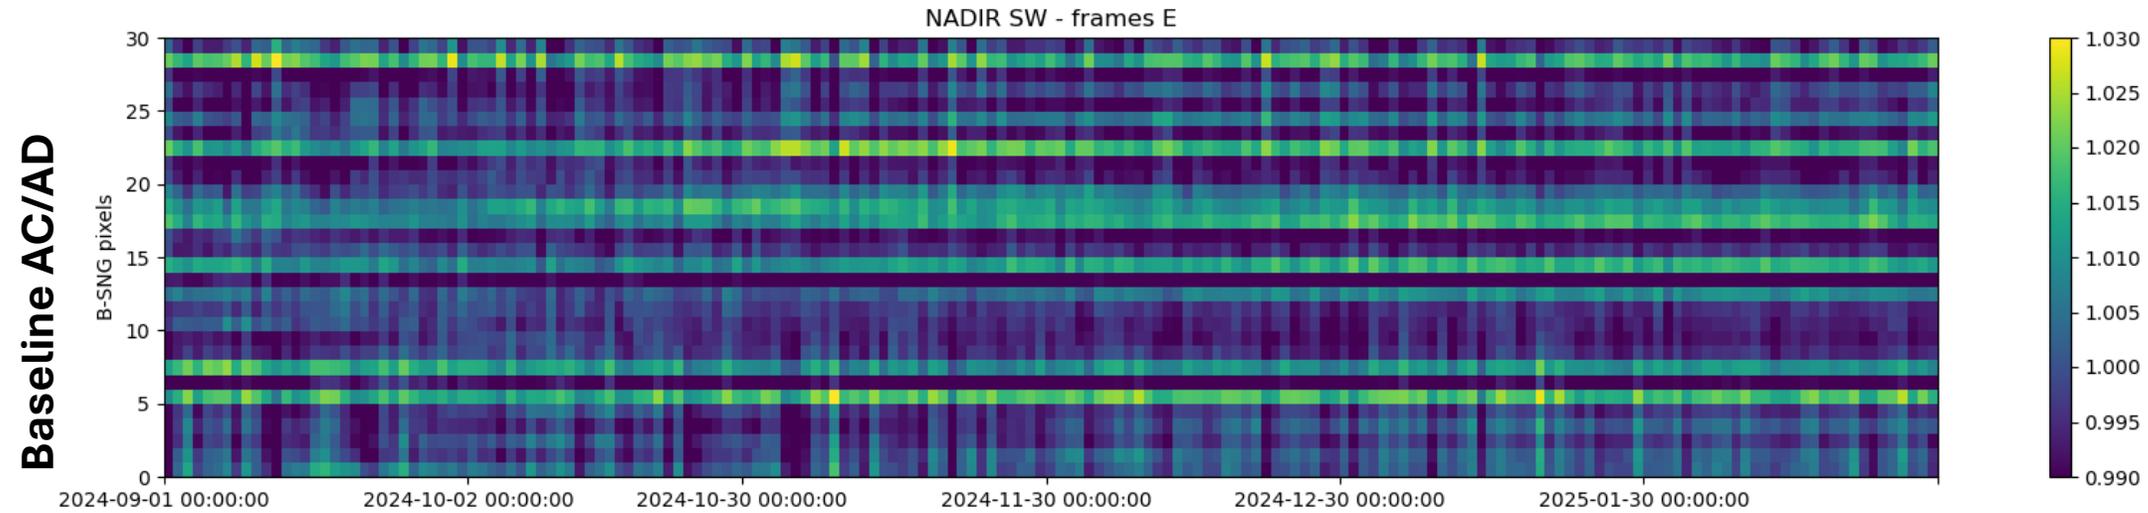

B_SNG detector radiometric consistency : daily analysis - FORE

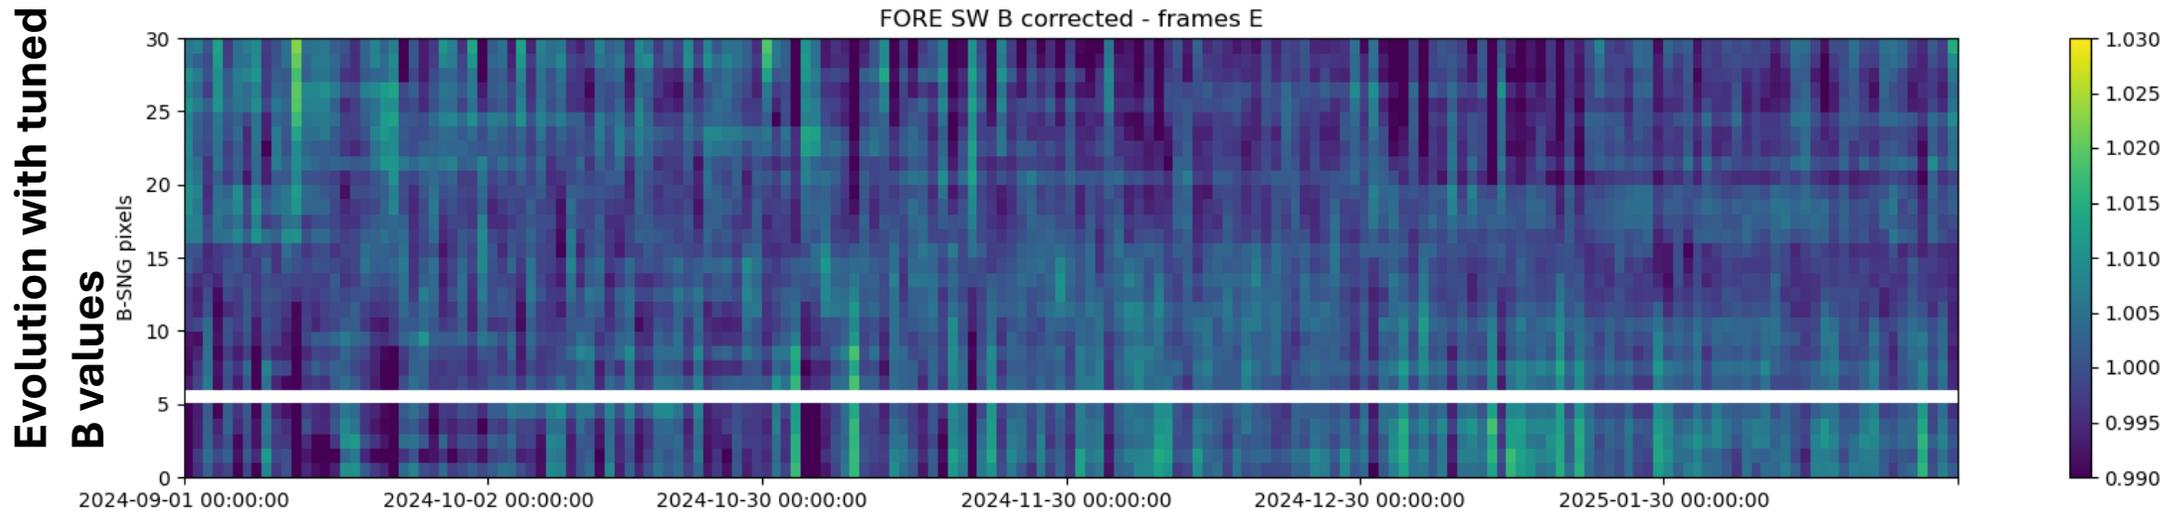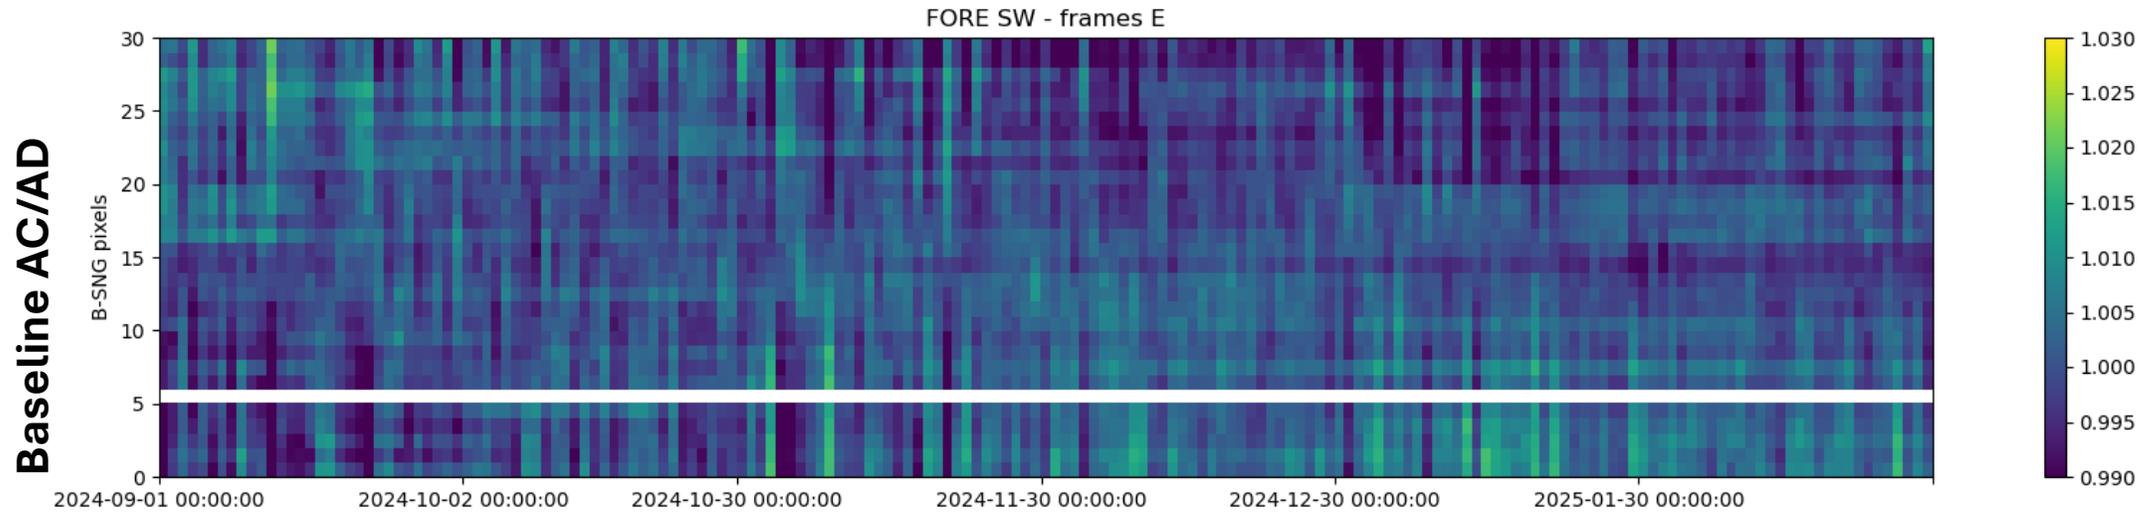

Summary - B-SNG L1 product



- Overall good quality and excellent availability since 18/06/2024, main interruptions are for calibration:
 - LW calibration during ~4s each 88s
 - Solar calibration each 2 months (at high latitude)
- Recently (Jan+Feb) several missing L1 science data due a threshold reached with the CTM encoder. The science data will be recovered in the next reprocessing.
- Important detector noise level but reduced in domain integration
- Detectors radiometric consistency: recommend to update the 'B' factors at detectors' level to improve the consistency
- Aft and fore views look consistent, no evidence of problem with the nadir view